

overview

- background suppression
- 15 ... 80 mm
- pulsed red LED
- push-pull
- external Teach-in / 1-Step Teach-in
- threaded sleeves M3 (stainless steel)
- cable 4 pin, 2 m
- 25 ... 50 °C
- IP 67



Technical data

general data

type	background suppression
light source	pulsed red LED
sensing distance Tw	15 ... 80 mm
sensing range Tb	7 ... 80 mm
smallest object recognizable typ.	0,25 mm at 40 mm
alignment / soiled lens indicator	flashing output indicator

power on indication	LED green
output indicator	LED yellow
sensing distance adjustment	external Teach-in / 1-Step Teach-in
wave length	644 nm
suppression of reciprocal influence	yes
alignment optical axis	< 1,5°

electrical data

response time / release time	< 1 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA (@ 30 VDC)

electrical data

current consumption typ.	16 mA (@ 24 VDC)
voltage drop Vd	< 2 VDC
output function	dark operate
output circuit	push-pull
output current	< 50 mA
short circuit protection	yes
reverse polarity protection	yes


mechanical data

width / diameter	8 mm
height / length	25,1 mm
depth	14,1 mm
type	rectangular
mechanical mounting	threaded sleeves M3 (stainless steel)
housing material	plastic (ASA, PMMA)
front (optics)	PMMA
connection types	cable 4 pin, 2 m
cable characteristics	PVC / PVC 4 x 0,08 mm²


ambient conditions

operating temperature	-25 ... +50 °C
protection class	IP 67


dimension drawing

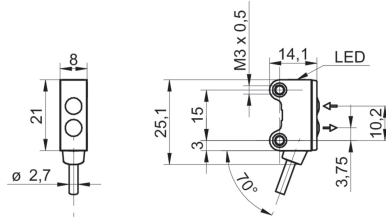

connection diagram

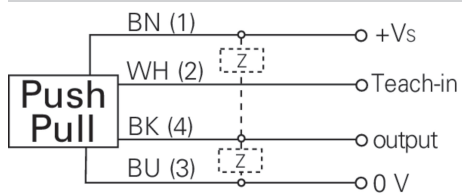

beam characteristic (typically)

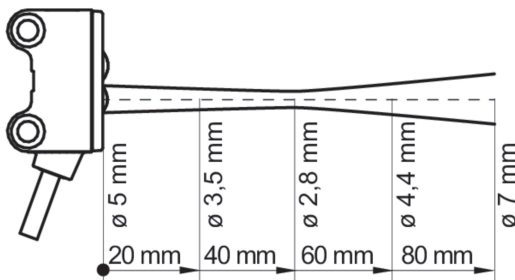

sensing distance diagram

