

# XS4P12PA340L1

inductive sensor XS4 M12 - L35mm - PPS -  
Sn4mm - 12..24VDC - cable 5m



## Main

|                                    |                                                         |
|------------------------------------|---------------------------------------------------------|
| Range of product                   | OsiSense XS                                             |
| Series name                        | General purpose                                         |
| Sensor type                        | Inductive proximity sensor                              |
| Sensor name                        | XS4                                                     |
| Sensor design                      | Cylindrical M12                                         |
| Size                               | 35 mm                                                   |
| Body type                          | Fixed                                                   |
| Detector flush mounting acceptance | Non flush mountable                                     |
| Material                           | Plastic                                                 |
| Type of output signal              | Discrete                                                |
| Wiring technique                   | 3-wire                                                  |
| [Sn] nominal sensing distance      | 4 mm                                                    |
| Discrete output function           | 1 NO                                                    |
| Output circuit type                | DC                                                      |
| Discrete output type               | PNP                                                     |
| Electrical connection              | Cable                                                   |
| Cable length                       | 5 m                                                     |
| [Us] rated supply voltage          | 12...24 V DC with reverse polarity protection           |
| Switching capacity in mA           | <= 200 mA DC with overload and short-circuit protection |
| IP degree of protection            | IP68 double insulation conforming to IEC 60529          |

## Complementary

|                          |                              |
|--------------------------|------------------------------|
| Thread type              | M12 x 1                      |
| Detection face           | Frontal                      |
| Front material           | PPS                          |
| Enclosure material       | PPS                          |
| Operating zone           | 0...3.2 mm                   |
| Differential travel      | 1...15% of Sr                |
| Cable composition        | 3 x 0.34 mm <sup>2</sup>     |
| Wire insulation material | PvR                          |
| Status LED               | Output state: 1 LED (yellow) |
| Supply voltage limits    | 10...36 V DC                 |
| Switching frequency      | <= 5000 Hz                   |
| Maximum voltage drop     | <2 V (closed)                |
| Current consumption      | <= 10 mA no-load             |
| Maximum delay first up   | 10 ms                        |
| Maximum delay response   | 0.1 ms                       |
| Maximum delay recovery   | 0.1 ms                       |
| Marking                  | CE                           |
| Threaded length          | 25 mm                        |
| Height                   | 12 mm                        |
| Length                   | 35 mm                        |
| Net weight               | 0.18 kg                      |

## Environment

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Product certifications                | CSA<br>UL                                                               |
| Ambient air temperature for operation | -25...70 °C                                                             |
| Ambient air temperature for storage   | -40...85 °C                                                             |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Packing Units

|                              |        |
|------------------------------|--------|
| Unit Type of Package 1       | PCE    |
| Number of Units in Package 1 | 1      |
| Package 1 Weight             | 142 g  |
| Package 1 Height             | 4.8 cm |
| Package 1 width              | 11 cm  |
| Package 1 Length             | 14 cm  |


## Offer Sustainability

|                            |                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                              |
| REACH Regulation           | <a href="#"> REACH Declaration</a>                                                                |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#"> EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                                                                                                                |
| RoHS exemption information | <a href="#"> Yes</a>                                                                              |
| Environmental Disclosure   | <a href="#"> Product Environmental Profile</a>                                                  |
| Circularity Profile        | <a href="#"> End of Life Information</a>                                                        |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

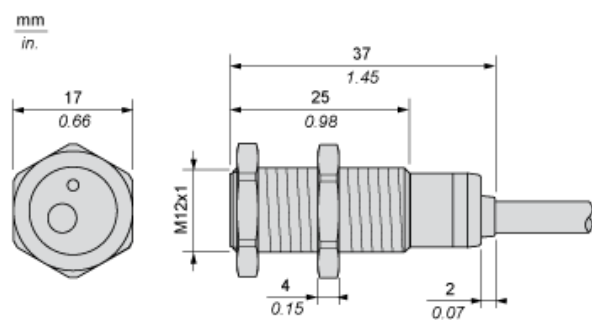

## Minimum Mounting Distances


Side by side



e (1) 16 mm/0.63 in.

≥


Face to face



e (2) 48 mm/1.89 in.

≥


Facing a metal object



e (3) 12 mm/0.47 in.

≥


Mounted in a metal support



d ≥ 36 mm/1.42 in.

h ≥ 8 mm/0.31 in.

## Mounting

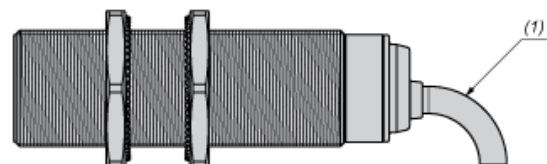


(1) Bending cable: 4 x external cable diameter

---

## Wiring Schemes

---

PNP




BU : Blue  
BN : Brown  
BK : Black

---

Performance Curves

---

Standard Steel Target : 12x12x1 mm

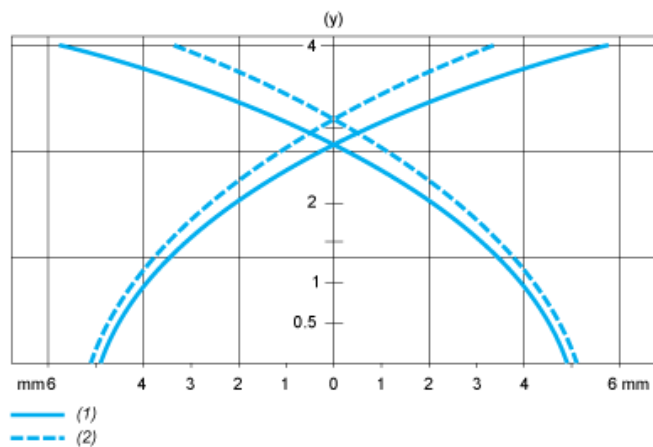

- (1) Pick-up points  
(2) Drop-out points (object approaching from the side)  
(y) Sensing distance in mm