

CP35MHT80

LASER


Part Number



- High resolution: 50 μm (resolution-mode)
- Linearity: 0,15 % (resolution-mode)
- Measured value independent of material, color and brightness
- Response time: < 1250 μs (speed-mode)
- Zoom function

These sensors work with a high-resolution CMOS line and DSP technology and determine distance using angular measurement. As a result, material, color and brightness related measurement differences are virtually eliminated.

Integrated analogue output can be configured for voltage 0...10 V (10...0 V) or current 4...20 mA (20...4 mA).

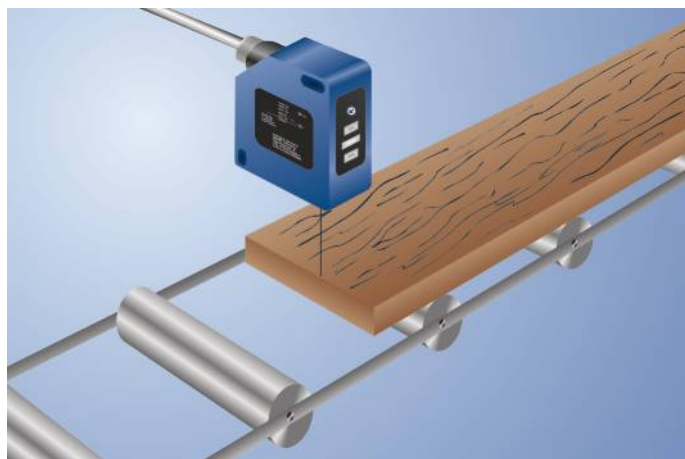

Technical Data

Optical Data

Working Range	50...350 mm
Measuring Range	300 mm
Resolution	50 μm
Resolution (Speed-Mode)	80 μm
Linearity	0,15 %
Linearity (Speed-Mode)	0,2 %
Light Source	Laser (red)
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 80 mA
Measuring Rate	800 /s
Measuring Rate (Resolution-Mode)	400 /s
Response Time	< 1250 μs
Response Time (Resolution Mode)	< 2500 μs
Temperature Drift	< 25 $\mu\text{m/K}$
Temperature Range	-25...50 °C
Analog Output	0...10 V/4...20 mA
Load Current Voltage Output	< 1 mA
Current Output Load Resistance	< 500 Ohm
Interface	RS-232
Baud Rate	38400 Bd
Protection Class	III
FDA Accession Number	0820590-000

Mechanical Data

Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 × 1; 8-pin

Safety-relevant Data


MTTFd (EN ISO 13849-1)	713,97 a
------------------------	----------

Error Output	●
Analog Output	●
RS-232 Interface	●

Connection Diagram No.	529
Control Panel No.	P7
Suitable Connection Equipment No.	80
Suitable Mounting Technology No.	380

Complementary Products


Analog Evaluation Unit AW02
Fieldbus Gateway ZAGxxxN01, EPGG001
Interface Cable S232W3
Protective Housing ZSV-0x-01
Set Protective Housing ZSP-NN-02
Software



P7

Diagram illustrating a 7-ball pool rack. The balls are numbered 1 through 7. The cue ball (1) is at the bottom. The other balls are arranged in a triangular rack above it: 2 is at the top, 3 is to its right, 4 is to its left, 5 is to the right of 4, 6 is to the left of 4, and 7 is to the right of 6.

529



+	Supply Voltage +
–	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
Ī	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
	IO-Link
PoE	Power over Ethernet
IN	Safety Input
QSD	Safety Output
Signal	Signal Output
BL-D ^{+/–}	Ethernet Gigabit bidirect. data line (A-D)
EN0 ^{EN542}	Encoder 0-pulse 0-0 (TTL)

PT	Platinum measuring resistor
nc	not connected
U	Test Input
Ū	Test Input inverted
W	Trigger Input
W –	Ground for the Trigger Input
O	Analog Output
O –	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY –	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
±	Grounding
SnR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contactor Monitoring

ENAR542Z	Encoder A/Ā (TTL)
ENBR542Z	Encoder B/B̄ (TTL)
ENA	Encoder A
ENB	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY In	Synchronization In
SY OUT	Synchronization OUT
OLT	Brightness output
M	Maintenance
rsy	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Working Distance	50 mm	350 mm
Spot Size	0,6 × 1,5 mm	1,5 × 4 mm

a = Analog Voltage Output