

Product Life Status : **END OF STANDARD SERVICE**

TODAY
FEB 21, 2021

End of Commercialization
DEC 08, 2020

End of Standard Service
DEC 08, 2020



Main

Range of product	OsiSense XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Device application	-
Sensor name	XS1
Sensor design	Cylindrical M5
Size	29 mm
Body type	Fixed
Detector flush mounting acceptance	Flush mountable
Material	Stainless steel
Type of output signal	Discrete
Wiring technique	3-wire
[Sn] nominal sensing distance	0.8 mm
Discrete output function	1 NO
Output circuit type	DC
Discrete output type	NPN
Electrical connection	Remote male connector M8, 3 pins

Product Life Status : **END OF STANDARD SERVICE**

FEB 21, 2021

End of Commercialization
DEC 08, 2020

End of Standard Service
DEC 08, 2020


Complementary

Thread type	M5 x 0.5
Detection face	Frontal
Front material	PPS
Enclosure material	Stainless steel 303
Operating zone	0...0.6 mm
Status LED	Output state: 1 LED (yellow)
Threaded length	29 mm
Length	29 mm

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

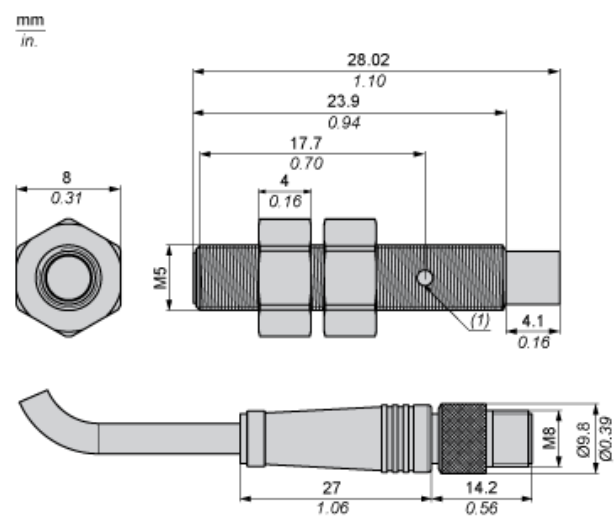

Minimum Mounting Distances in mm


Side by side



e (1) 2 mm/0.79 in.

≥


Face to face



e (2) 12 mm/0.47 in.

≥


Facing a metal object



e (3) 3 mm/0.12 in.

≥

Mounted in a metal support




d ≥ 5 mm/0.17 in.

h ≥ 0 mm/0 in.


Tightening torque : 2.2 N.m. (values obtained with washers mounted)

Wiring Schemes

M8 Connector




NPN



Performance Curves

Standard Steel Target (mm) : 5x5x1

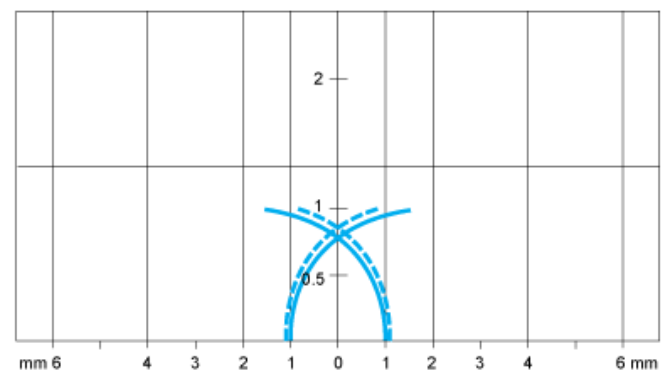

— Pick-up points
- - - Drop-out points (object approaching from the side)
(y) Sensing distance in mm