
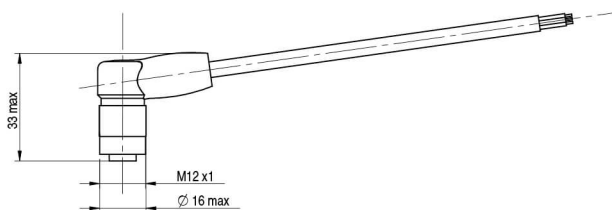


CD

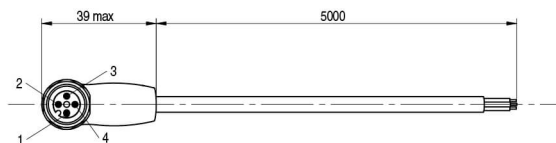

Indicative image

### Electrical data

Nominal current	4 A
Led	2 (Supply - PNP output pin 4)
Wires	4
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

### Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	=10°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
1	5
Head type	90°
Plug	M12
Outer diameter	Ø 4,5 mm ± 5%
Jacket material	PVC CEI 2022 II OR
Wire isolation	PVC
Conductors section	0,25 mm <sup>2</sup> (32 x 0,10 mm <sup>2</sup> )

**Test/Approvals**

Degree of protection

IP67

**General Data**


Operating Temperature

=10°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)

Mechanical Protection

IP67

## ELECTRICAL DIAGRAMS OF THE CONNECTIONS

**Datasensing S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail info@datasensing.com

**date of printing**

29/04/2022 13:06:54