

RFID Transponder

IQC24-C1 10pcs




- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 64 bit Fixcode
- 992 bytes memory freely available
- Readable and writable from both sides
- Degree of protection IP68
- ISO credit card format

Data carrier



Dimensions

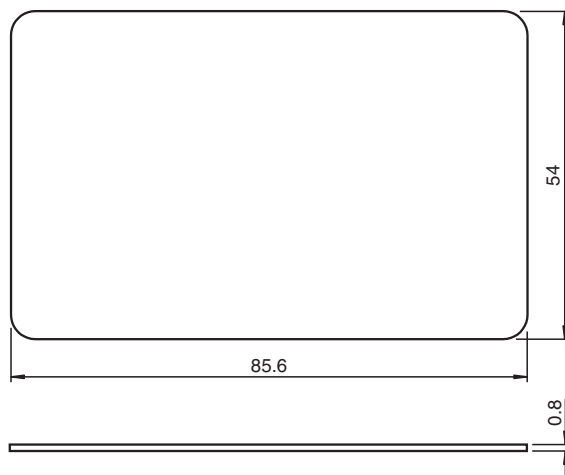

Technical Data

General specifications		
Operating frequency		13.56 MHz
Transfer rate		26 kBit/s
Memory		
Chip Type		my-d SRF 55V10P (Infineon)
EEPROM		992 Byte
UID		64 Bit
Memory organization		4 bytes/block
Read cycles		unlimited
Write cycles		> 100000
Data retention period		10 years
Directive conformity		
Radio equipment		
Directive 2014/53/EU		EN 300330
RoHS		
Directive 2011/65/EU (RoHS)		EN 50581

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 70113493_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Standard conformity

Degree of protection	EN 60529
RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3

Ambient conditions

Ambient temperature	-25 ... 50 °C (-13 ... 122 °F)
Storage temperature	-25 ... 50 °C (-13 ... 122 °F)

Mechanical specifications

Degree of protection	IP68
Material	
Housing	PVC
Installation	
In air	yes
Mass	6 g
Construction type	Card
Note	Packaging unit, 10-piece

Application

The transponder can be read and written from either side.

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 70113493_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**