




RETROREFLECTIVE POLARIZED AREA SENSORS

- Area height controlled 69 mm
- Maximum operative distance up to 4.5 m
- Minimum object detection diam. 6mm
- Two teach-in types: fine and standard
- Optical pitch 10mm
- Protection degree IP67
- Blanking function

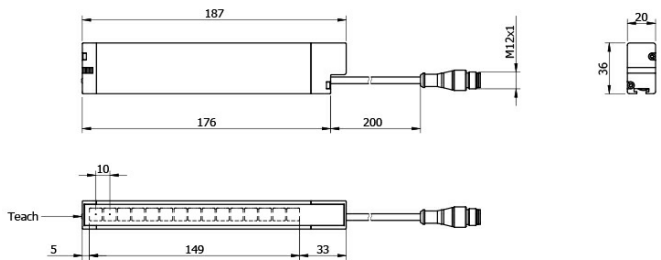

Detection properties	
Nominal sensing distance	0,2 ... 4,5m (with RL136)
Thermal drift of Sr	≤10%
Beams space	10mm
controlled height	149mm
minimum detectable object	Ø 3...8mm @ 2m RL136 - Ø 3...18mm @ 4,5m RL136
number of rays	15
Sensitivity adjustment	Adjustment: fine < 3s; standard > 6s

Application	
Function Principle	Retroreflective Area Sensor

Outputs	
Output type	NPN + PNP
Output Function	NO/NC
Switching frequency	275Hz

Electrical data

Operating Voltage	12 - 30Vdc
No-Load supply current	100mA
Load current	160mA
Leakage current	≤100μA
Output voltage drop	3Vdc @ 100mA
Max ripple content	≤ 10%
LED indicators	green: supply/alignment; red: dark/light state
Time delay before availability	300ms
Short-circuit protection	Yes (autoreset)
Reverse Polarity Protection	Si
Emission	Red
Interference to external light	5000lux (fluorescent lamp); 50000lux (sunlight)
Impulsive Overvoltage Protection	Si

Mechanical data

Dimensions	187mm x 20mm x 36mm
Weight	170g
Housing Material	aluminum
Connections	M12 pigtail
Active Head Material	PMMA
Operating temperature	-10°C...+ 55° C (no condensation)

Test/Approvals

Approvals	CE
EMC compatibility	EN 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2 / 7.4
Degree of protection	IP67


Accessories

Supplied Accessories	Reflector RL136 + fixing kit (ST151)
----------------------	--------------------------------------

Generical Data

Dimensions	187mm x 20mm x 36mm
Operating Temperature	-10°C...+ 55° C (no condensation)
Mechanical Protection	IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

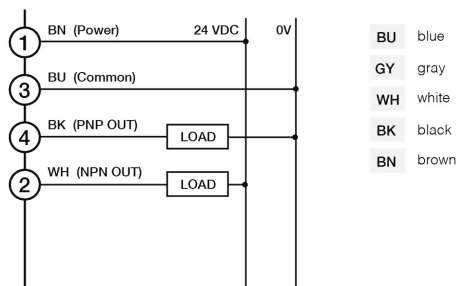

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 00:11:10