

GIM140R - 2-dimensional, analog

2-dimensional, measuring range up to $\pm 60^\circ$

Analog

Overview

- Size 48 mm
- Interface Analog
- MEMS capacitive measuring principle
- Measuring range 2-dimensional: up to $\pm 60^\circ$
- Aluminium housing
- Protection IP 67/IP 69K
- Connection cable
- Teach input for adjustment of zero position



Technical data

Technical data - electrical ratings

Voltage supply	8...30 VDC 12...30 VDC
Reverse polarity protection	Yes
Short-circuit proof	Yes
Consumption typ.	8 mA (24 VDC, w/o load, voltage output) 12 mA (w/o load, current output)
Interface	Analog (4...20 mA / 0.5...4.5 V / 0...10 V)
Load resistor	Between Out/0 V $\geq 3 \text{ k}\Omega$ / voltage output 270 Ω at 10 VDC (500 Ω at 15 VDC) / current output
Measuring range	$\pm 10^\circ / \pm 30^\circ / \pm 45^\circ / \pm 60^\circ$
Resolution	0,05 °
Accuracy (+25 °C)	$\pm 0.4^\circ$
Sensing method	MEMS technology
Interference immunity	EN 61000-6-2

Technical data - electrical ratings

Emitted interference	EN 61000-6-3
Programmable parameters	Preset
Diagnostic function	Out-of-range diagnostics
Technical data - mechanical design	
Dimensions W x H x L	48 x 14 x 45 mm
Protection EN 60529	IP 67/IP 69K
Material	Housing: aluminium, anodised
Corrosion protection	ISO 9227:2017 salt mist according to ISO 12944-6:1998 C5-M (CX)
Operating temperature	-40...+85 °C
Resistance	EN 60068-2-6 Vibration 10 g, 10-2000 Hz EN 60068-2-27 Shock 50 g, 11 ms
Weight approx.	50 g
Connection	Cable 0.3 m, radial

Optional


- Analog output with out-of-range diagnostic

GIM140R - 2-dimensional, analog

2-dimensional, measuring range up to $\pm 60^\circ$

Analog

Installation position

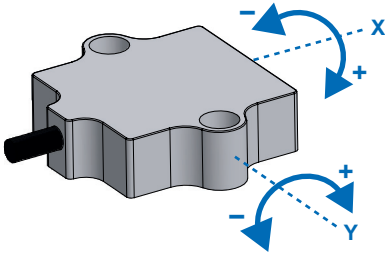


The 2-dimensional inclination sensor must be mounted with the base plate in horizontal position, i.e. parallel to the horizontal line.

The sensor can be inclined both towards the X and Y axis at the same time. For each axis a separate measured value is provided. Default on delivery the inclination sensor will apply the selected sensing range to both axis, for example $\pm 30^\circ$ with the zero passage being precisely in the horizontal line.

Y = 0°




Y = -30°



X = $+30^\circ$



X = $+30^\circ$



Terminal assignment

Cable

Core color	Signal	Description
White	0 V	Ground relating to +Vs
Brown	+Vs	Voltage supply
Green	Out_X	Output
Yellow	Out_Y	Output
Grey	Teach	Teach-input

Cable data: 5 x 0.5 mm²

GIM140R - 2-dimensional, analog



2-dimensional, measuring range up to $\pm 60^\circ$

Analog

Output signals



Analog output

Measuring range $-30^\circ \dots +30^\circ$

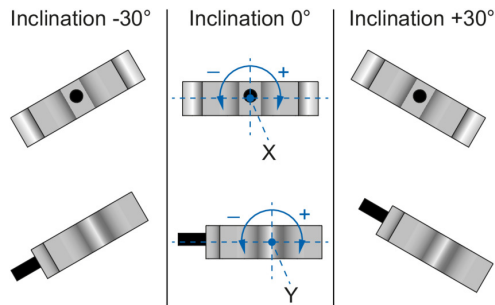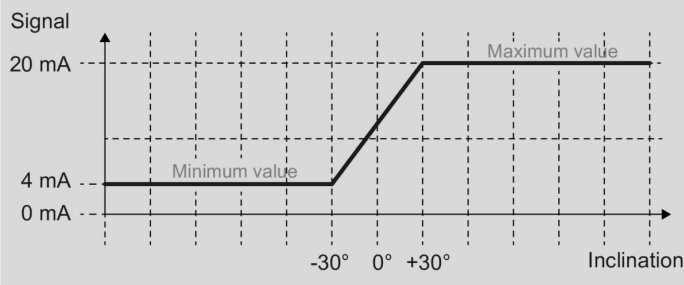

Analog output



Measuring range $-45^\circ \dots +45^\circ$

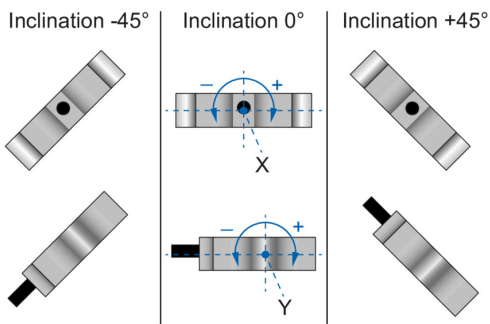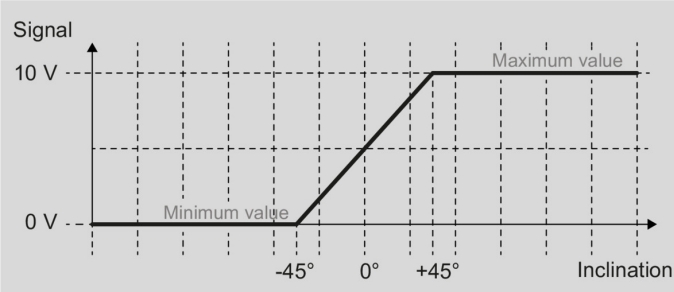

Output signals

Analog output

Measuring range $-60^\circ \dots +60^\circ$

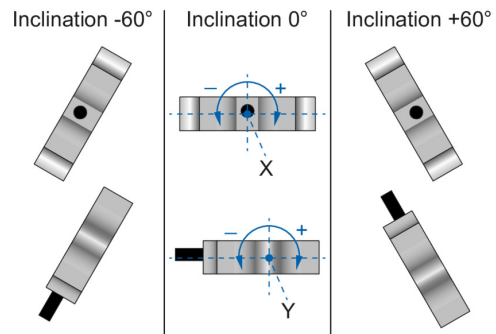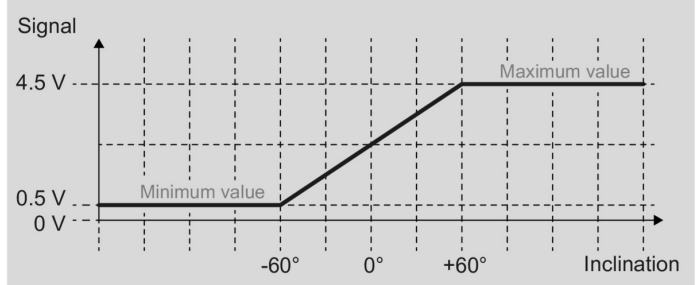

GIM140R - 2-dimensional, analog



2-dimensional, measuring range up to $\pm 60^\circ$

Analog

Output signals

Analog output with out-of-range diagnostic



Measuring range $-30^\circ \dots +30^\circ$

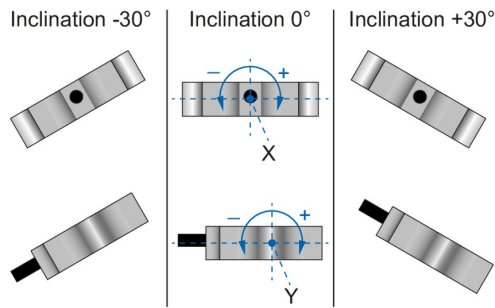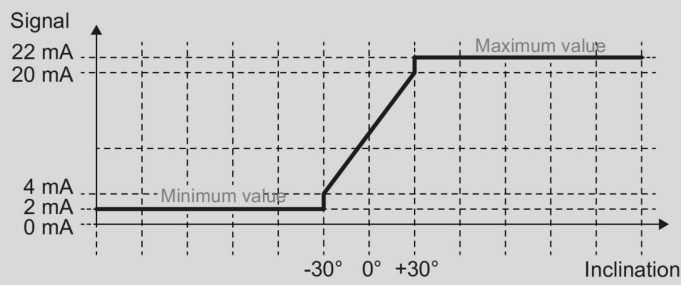

Output signals



Analog output with out-of-range diagnostic

Measuring range $-60^\circ \dots +60^\circ$

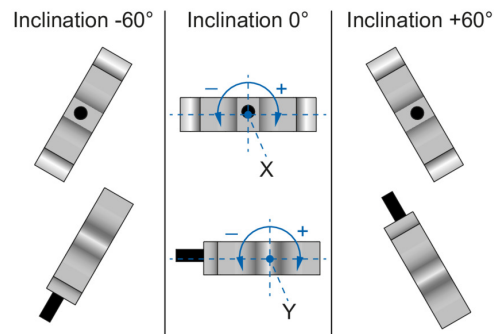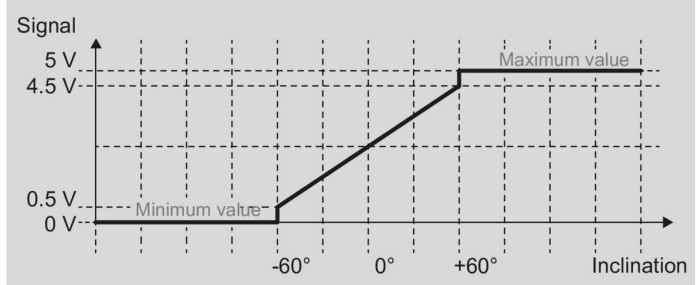

Analog output with out-of-range diagnostic

Measuring range $-45^\circ \dots +45^\circ$

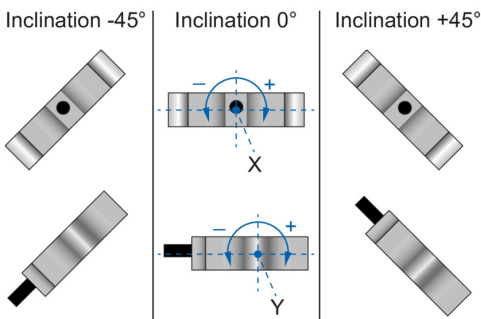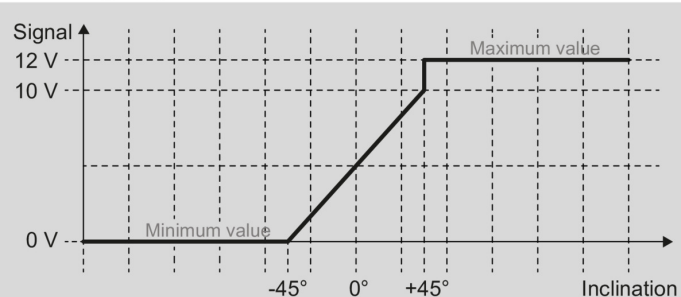

Trigger level

Teach-input

High level	>2.1 V
Low level	<1 V
Maximum	+Vs

Teach process

The teach-in function enables rapid and easy commissioning in the field.

Setting zero


- Get inclination sensor on position intended for zero position.
- Set teach input for $5 < t < 10$ seconds on high level.

GIM140R - 2-dimensional, analog

2-dimensional, measuring range up to $\pm 60^\circ$

Analog

Dimensions

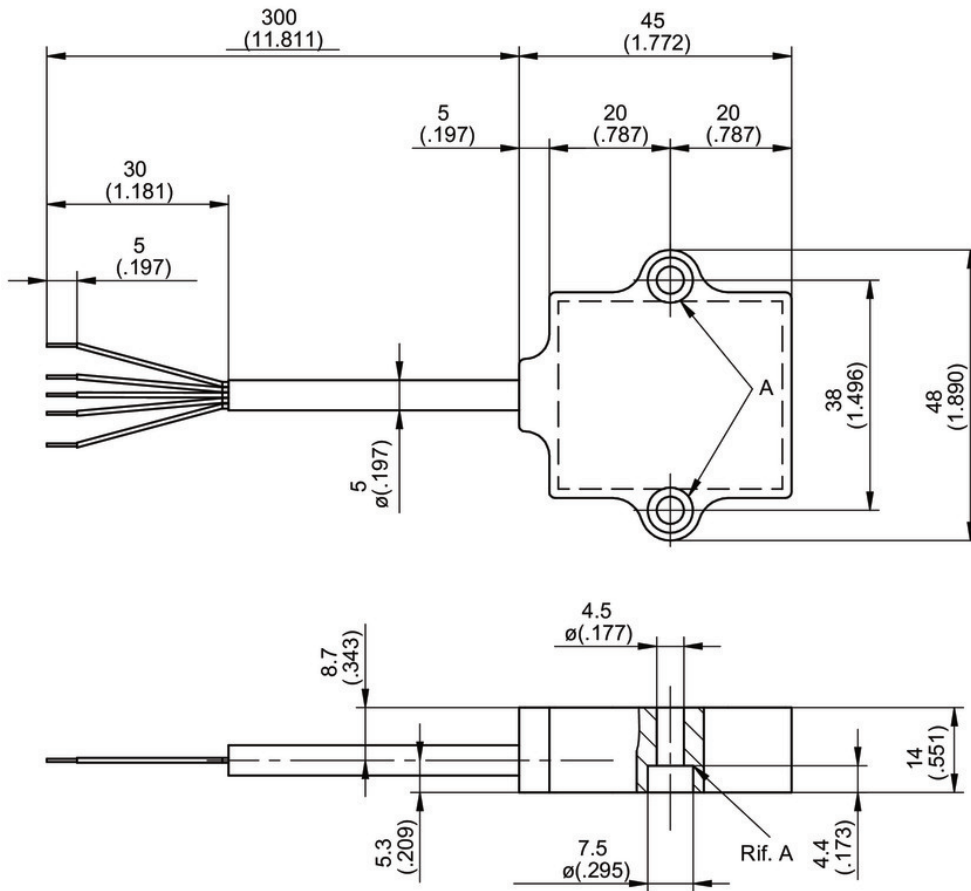

GIM140R - 2-dimensional, analog

 2-dimensional, measuring range up to $\pm 60^\circ$

Analog

Ordering reference

	GIM140R	-	M	2	###	.	K	##	.	A	#####
Product	GIM140R										
Housing											
Metal			M								
Number of axes											
2-dimensional, housing horizontal				2							
Measuring range											
$\pm 10^\circ$ (Analog with zero setting)					10						
$\pm 30^\circ$ (Analog with zero setting)					30						
$\pm 45^\circ$ (Analog with zero setting)					45						
$\pm 60^\circ$ (Analog with zero setting)					60						
Connection											
Cable 0.3 m, Standard 5x0.5 mm ²							K				
Voltage supply / interface											
8...30 VDC / Analog 0.5...4.5 VDC								V3			
12...30 VDC / Analog 0...10 VDC								V6			
12...30 VDC / Analog 4...20 mA								C0			
Operating temperature											
-40...+85 °C										A	
Option											
Without option											
Output signal with out-of-range diagnostics (Analog)											/4822

Accessories

Programming accessories

11084376 ZTEST-ALL.ANALOG