



Metal face sensors | Switching point

M30

One piece stainless steel housing

DC 18...30 V

PNP output


Teach-in programming



Design

Teach-in • M30x1.5

Dimensions



Sensing range [mm] 150...1500

Output



ID-No. P72033

Type AGVU 1500 GSP

Supply voltage [V] 18...30 DC

Current consumption [mA] < 40

Switching current [mA] 500

Repeatability [%] ±0.2


Switching frequency [Hz] 7

Ambient temperature [°C] -15...+70

Protection [EN 60529] IP 68 + IP 69



Housing material AISI 316 Ti

Connection M12 connector

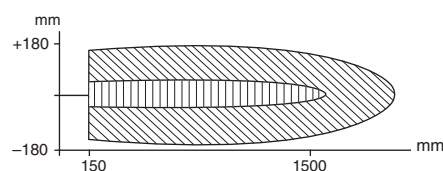

■ mögliche Erfassung eines großen Objektes
Possible detection of a large target

▨ Sichere Erfassung eines 100x100 mm Objektes
Safe detection of a 100x100 mm target



Accessories

Connecting cable type SLG 5-2 (Z01150)