

overview

- 0 ... 24 mm
- voltage output
- external Teach-in
- connector M12
- -25 ... 75 °C
- IP 67



Technical data

general data

mounting type	non-flush
special type	linearized
measuring distance Sd	0 ... 24 mm
sensitivity	0,42 V/mm
resolution	< 0,005 mm (stat.) < 0,01 mm (dynam.)
repeat accuracy	< 0,02 mm
adjustment	external Teach-in
teach	1-point analog, 2-point analog, factory re-set
linearity error	± 480 µm
temperature drift	± 6 % (Full Scale)
Teach-Feedback	LED yellow

electrical data

response time (factory characteristic)	< 5 ms
voltage supply range +Vs	12 ... 36 VDC

electrical data

current consumption max. (no load)	20 mA
output circuit	voltage output
output signal	0 ... 10 VDC
load resistance	> 4000 Ohm
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	30 mm
housing length	60 mm
connection types	connector M12
tightening torque max.	100 Nm


ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67


remarks

- external Teach-in
- linear analog output

dimension drawing

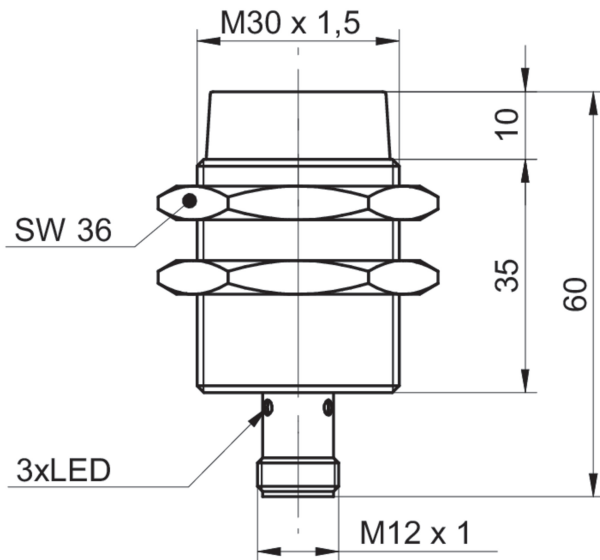

connection diagram

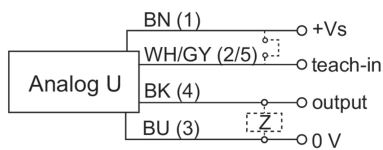

pin assignment

