

Pressure Sensor

FX0P202

Part Number



- Analog output: 4 ... 20 mA
- Compact, laser-welded V4A stainless steel housing
- Outstanding measuring accuracy: $\pm 0.5\%$
- Very short response time: < 1 ms

weFlux² InoxSens

Technical Data

Sensor-specific data

Measuring Range	0...400 bar
Measurement Type	relative
Maximum overload pressure	800 bar
Bursting pressure	1000 bar
Medium	Liquids, gases
Pressure Response Time (t ₉₀)	< 1 ms
Measuring error (total)	< 1 %
Temperature Coefficient Zero-Point	<± 0,15% /10K
Temperature Coefficient Range	<± 0,2% /10K

Environmental conditions

Temperature of medium	-25...125 °C**
Ambient temperature	-25...80 °C
Atmospheric humidity	100 % r.H.
Storage temperature	-25...80 °C
EMC	DIN EN 61326-2-3
Shock resistance per DIN IEC 68-2-27	50 g / 11 ms
Vibration resistance per DIN IEC 60068-2-6	10 g (10...2000 Hz)

Electrical Data

Supply Voltage	9...28 V DC
Current Consumption (U _b = 24 V)	< 21 mA
Analog Outputs	1
Analog Output	4...20 mA Press
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III

Mechanical Data

Sensor element	Stainless steel diaphragm
Housing Material	1.4404
Material in contact with media	1.4404; 1.4548; FKM
Degree of Protection	IP68/IP69K *
Connection	M12 × 1; 4-pin
Process Connection	G 1/2"
{Dichtungsmaterial}	FKM


Safety-relevant Data

MTTFd (EN ISO 13849-1)	3283,16 a
Analog Output	●
Connection Diagram No.	142
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	903

* Not UL certified

** Sensors suitable up to 125 °C media temperature. During installation, please ensure that the sensor housing is adequately cooled by the surroundings.




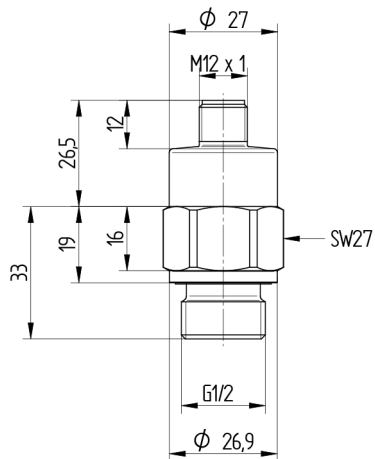

All dimensions in mm (1 mm = 0.03937 Inch)



142



Legend

+	Supply Voltage +
-	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
$\bar{A}$	Switching Output (NC)
V	Contamination/Error Output (NO)
$\bar{V}$	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
	IO-Link
PoE	Power over Ethernet
IN	Safety Input
OSSD	Safety Output
Signal	Signal Output
BI-D+/-	Ethernet Gigabit bidirect. data line (A-D)
EN0.05422	Encoder 0-pulse 0-0 (TTL)

PT	Platinum measuring resistor
nc	not connected
U	Test Input
$\bar{U}$	Test Input inverted
W	Trigger Input
W-	Ground for the Trigger Input
O	Analog Output
O-	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY-	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
$\pm$	Grounding
SnR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contacting Monitoring

EN0.05422	Encoder A/ $\bar{A}$ (TTL)
EN0.05422	Encoder B/ $\bar{B}$ (TTL)
ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY In	Synchronization In
SY OUT	Synchronization OUT
OLt	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow