

IWRM 12U9502

Inductive distance measuring sensors

Article number: 10118831

overview

- 1 ... 1,5 mm
- voltage output
- cable, 2 m
- 60 °C
- IP 67



Technical data

general data

mounting type	flush
measuring distance Sd	1 ... 1,5 mm
reference distance	1,15 ... 1,35 mm
measuring speed	< 0,5 mm / ms
repeat accuracy	< 0,02 mm
linearity error	± 60 µm
temperature coefficient	1 µm / (K mm)

electrical data

voltage supply range +Vs	14 ... 30 VDC
current consumption max. (no load)	20 mA
output circuit	voltage output
output signal	1 ... 9 VDC
load resistance	> 1000 Ohm

electrical data

residual output ripple	< 0,5 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	12 mm
housing length	50 mm
connection types	cable, 2 m
tightening torque max.	15 Nm (Front: 10 Nm)

ambient conditions


operating temperature	0 ... +60 °C
protection class	IP 67

IWRM 12U9502

Inductive distance measuring sensors

Article number: 10118831

dimension drawing

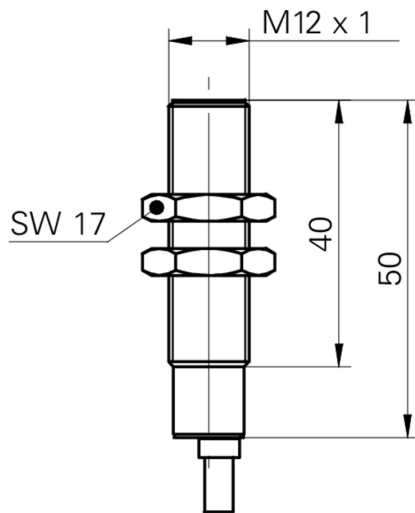

connection diagram

