

overview


- Extended functional reserve capacities for maximum reliability
- Long-term stable detection of transparent objects thanks to compensation of environmental influences
- Parallel laser beam for uniform detection over the measuring range
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Robust housing with stainless steel spacer sleeves




Technical data

general data		electrical data	
type	retro-reflective sensor	current consumption max. (no load)	20 mA (@ 10 VDC)
version	transparency object detection	current consumption typ.	10 mA (@ 24 VDC)
light source	pulsed red laser diode	voltage drop Vd	< 2 VDC
actual range Sb	0,8 m	output function	light / dark operate
nominal range Sn	1,2 m	output circuit	NPN complementary
polarization filter	yes	output current	< 50 mA
minimal signal attenuation	10 %	short circuit protection	yes
alignment / soiled lens indicator	flashing output indicator	reverse polarity protection	yes
output indicator	LED yellow	mechanical data	
power on indication	LED green	width / diameter	8 mm
sensitivity adjustment	qTeach	height / length	25,1 mm
laser class	1	depth	15,8 mm
distance to focus	parallel beam	type	rectangular
wave length	680 nm	mechanical mounting	sleeve smooth (stainless steel)
suppression of reciprocal influence	yes	housing material	plastic (ASA, PMMA)
alignment optical axis	< 1,5°	front (optics)	PMMA
electrical data		connection types	cable 4 pin, 2 m
response time / release time	< 0,25 ms	cable characteristics	PVC / PVC 4 x 0,08 mm²
jitter	< 0,06 ms	ambient conditions	
voltage supply range +Vs	10 ... 30 VDC	operating temperature	-20 ... +50 °C
		protection class	IP 67

dimension drawing



connection diagram

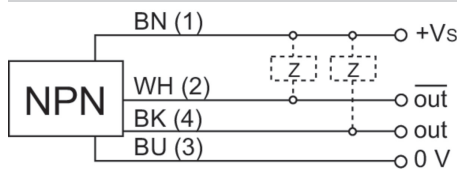


laser warning

**CLASS 1 LASER
PRODUCT**

IEC 60825-1/2014

Complies with 21 CFR 1040.10 and 1040.11
except for deviations pursuant to laser
notice No. 50, dated June 24, 2007

beam characteristic (typically)

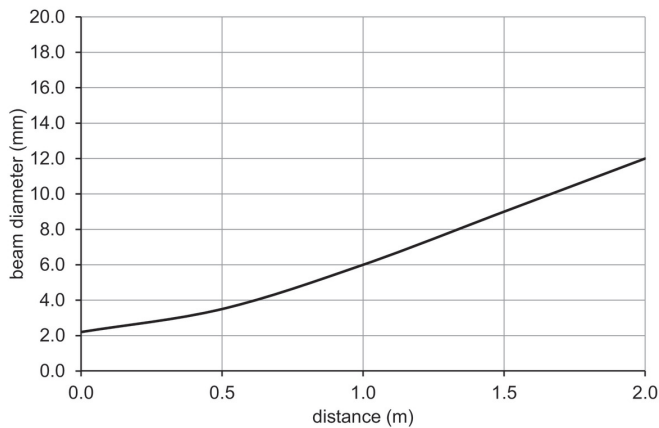

excess gain curve

