

# XUB0ANSNL2

photo-electric sensor - XUB - multi - Sn 0..20m  
- 12..24VDC - cable 2m



## Main

|                               |  |
|-------------------------------|--|
| Range of product              | OsiSense XU  |
| Series name                   | General purpose multimode  |
| Electronic sensor type        | Photo-electric sensor  |
| Sensor name                   | XUB  |
| Sensor design                 | Cylindrical M18  |
| Detection system              | Multimode  |
| Material                      | Plastic  |
| Line of sight type            | Axial  |
| Type of output signal         | Discrete   |
| Supply circuit type           | DC   |
| Wiring technique              | 3-wire   |
| Discrete output type          | NPN  |
| Discrete output function      | 1 NO or 1 NC programmable  |
| Electrical connection         | Cable  |
| Cable length                  | 2 m  |
| Product specific application  | -  |
| Emission                      | Infrared diffuse<br>Infrared diffuse with background suppression<br>Infrared thru beam<br>Red polarised reflex   |
| [Sn] nominal sensing distance | 3 M polarised reflex need reflector XUZC50<br>20 M thru beam need a transmitter XUB0AKSNL2T<br>0.12 M diffuse with background suppression<br>0.3 m diffuse |

## Complementary

|                           |   |
|---------------------------|---|
| Enclosure material        | PBT   |
| Lens material             | PMMA  |
| Maximum sensing distance  | 0.12 M diffuse with background suppression<br>0.4 M diffuse<br>30 M thru beam<br>4.5 m polarised reflex |
| Output type               | Solid state   |
| Add on output             | Without   |
| Wire insulation material  | PvR   |
| Status LED                | 1 LED (green) for supply<br>1 LED (red) for instability<br>1 LED (yellow) for output state              |
| [Us] rated supply voltage | 12...24 V DC with reverse polarity protection   |
| Supply voltage limits     | 10...36 V DC  |
| Switching capacity in mA  | <= 100 mA (overload and short-circuit protection)   |
| Switching frequency       | <= 250 Hz   |
| Maximum voltage drop      | <1.5 V (closed state)   |
| Current consumption       | 35 mA no-load   |
| Maximum delay first up    | 200 ms  |
| Maximum delay response    | 2 ms  |
| Maximum delay recovery    | 2 ms  |
| Setting-up                | Self-teaching   |
| Diameter                  | 18 mm   |

|            |          |
|------------|----------|
| Length     | 64 mm    |
| Net weight | 0.095 kg |

## Environment

|                                       |  |
|---------------------------------------|--|
| Product certifications                | CSA<br>UL<br>CE  |
| Ambient air temperature for operation | -25...55 °C  |
| Ambient air temperature for storage   | -40...70 °C  |
| Vibration resistance                  | 7 gn, amplitude = +/- 1.5 mm (f = 10...55 Hz) conforming to IEC 60068-2-6                        |
| Shock resistance                      | 30 gn (duration = 11 ms) conforming to IEC 60068-2-27  |
| IP degree of protection               | IP65 double insulation conforming to IEC 60529<br>IP67 double insulation conforming to IEC 60529 |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Weight             | 102 g    |
| Package 1 Height             | 4.1 cm   |
| Package 1 width              | 9.5 cm   |
| Package 1 Length             | 13 cm    |
| Unit Type of Package 2       | S02      |
| Number of Units in Package 2 | 22       |
| Package 2 Weight             | 2.636 kg |
| Package 2 Height             | 15 cm    |
| Package 2 width              | 30 cm    |
| Package 2 Length             | 40 cm    |


## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes  |
| RoHS exemption information | <a href="#">Yes</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |
| Circularity Profile        | <a href="#">End of Life Information</a>  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

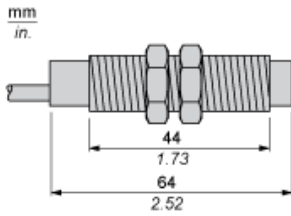


---

## Connections and Schemes

---

### NPN

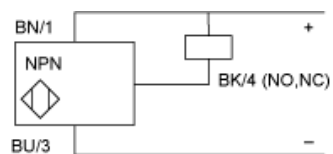


BN : Brown

BU : Blue


BK : Black

Detection Curves

With Thru-beam Accessory (Thru-beam)

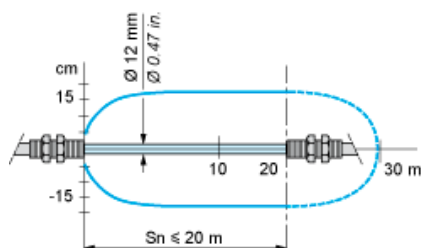


Without Accessory (Diffuse)

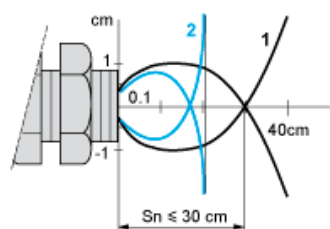


- 1 : White 90%
  - 2 : Grey 18%
- Object 10 x 10 cm

Without Accessory (Diffuse with background suppression)

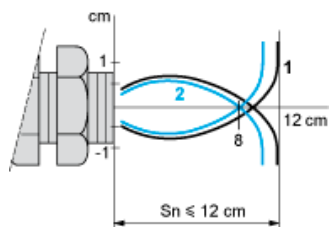

- 1 : White 90%
  - 2 : Grey 18%
- Object 10 x 10 cm


With reflector (Polarised reflex)

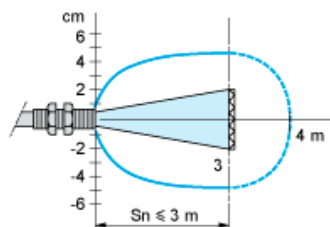


With reflector XUZC50

## Variation of Usable Sensing Distance $S_u$ (Without accessory, with adjustable background suppression)

Teach Mode at Minimum

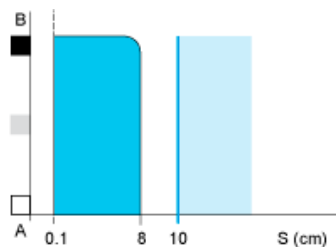

Teach Mode at Maximum

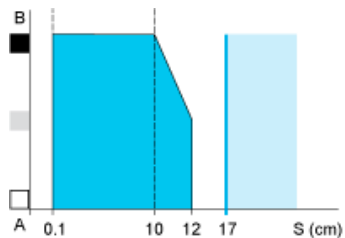

- (1) Black 6%
- (2) Grey 18%
- (3) White 90%
- (4) Sensing range
- (5) Non sensing zone (matt surfaces)

A-B : Object reflection coefficient


- (1) Black 6%
- (2) Grey 18%
- (3) White 90%
- (4) Sensing range
- (5) Non sensing zone (matt surfaces)

## Variation of Usable Sensing Distance

Minimum Setting



Maximum Setting

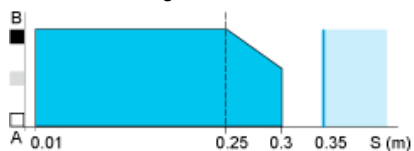

- (1) Black 6%
- (2) Grey 18%
- (3) White 90%
- (4) Sensing range
- (5) Non sensing zone (matt surfaces)

A-B : Object reflection coefficient

- (1) Black 6%
- (2) Grey 18%
- (3) White 90%
- (4) Sensing range
- (5) Non sensing zone (matt surfaces)