


High temperature resistant level capacitive sensor **CE53S** series



Feature description

- Using special materials and separate structure design, more stable performance
- Multiple size detection head options
- With clear working status indication and sensitivity adjustment function
- Widely used in high temperature environment target detection, such as dispensing equipment

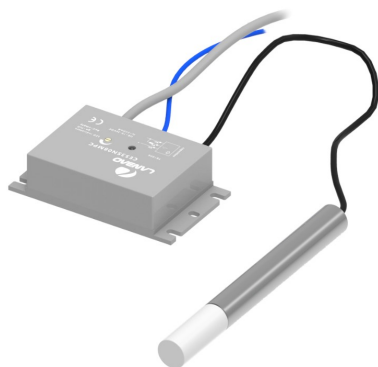


Model specification

NPN NO	CE53SN08MNO	PNP NO	CE53SN08MPO
NPN NC	CE53SN08MNC	PNP NC	CE53SN08MPC

Specifications

Installation type	Non-flush(Contact use)	Indicator display	Power indicator:Red LED;Output indication:Green LED
Adjust the distance	8mm(Adjustable)	Ambient temperature	Amplifier:0°C...+60°C;Induction head:250°C Max
Standard target	ST45 carbon steel,inner diameter> 20mm,thickness 1mm ring	Switching frequency	0.3 Hz
Shape specification	Amplifier:95.5*55*22mm;Induction head:Φ16*150mm	Protection degree	IP54
Output type	NO/NC(Depending on model)	High pressure resistant	500V/AC 50/60Hz 60s
Supply voltage	18...36VDC	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range	3...20%	Vibration resistance	Complex amplitude1.5mm 10...50Hz
Repetitive error	≤5%		(2 hours each in X,Y,and Z directions)
Load current	≤250mA	Housing material	Amplifier:PA6;Sensor head:Teflon+stainless steel
Residual voltage	≤2.5V	Detection head Connection cable	Teflon single core 1m shielded cable
Consumption current	≤100mA	Amplifier Connection cable	2m PVC cable
Protection circuit	Short circuit protection, overload protection, reverse polarity protection	Accessory	Slotted screwdriver

Dimensions

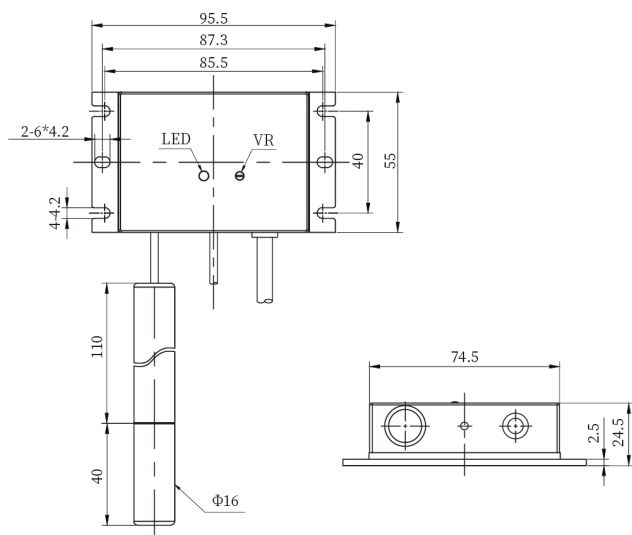

Wiring diagram

