



RFID Transponder


IQC22-22-T20 50pcs

- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 64 bit Fixcode
- 2 kBit memory available
- Readable and writable from both sides
- Degree of protection IP68

Data carrier



Dimensions



Technical Data

General specifications		
Operating frequency		13.56 MHz
Transfer rate		26 kBit/s
Memory		
Chip Type		Tag-it HF-I Plus (Texas Instruments)
EEPROM		2 kBit
UID		64 Bit
Memory organization		4 bytes/block
Read cycles		unlimited
Write cycles		> 100000
Data retention period		10 years at 25 °C (77 °F)
Directive conformity		
Radio equipment		
Directive 2014/53/EU		EN 300330
RoHS		
Directive 2011/65/EU (RoHS)		EN 50581

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 321574_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Standard conformity

Degree of protection	EN 60529
RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3


Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F)
Storage temperature	-25 ... 120 °C (-13 ... 248 °F)

Mechanical specifications

Degree of protection	IP68
Material	
Housing	PA 9t
Mass	1.7 g
Construction type	Cylindrical
Note	Packaging unit, 50-piece

Reading range in air IQC22-22-T9

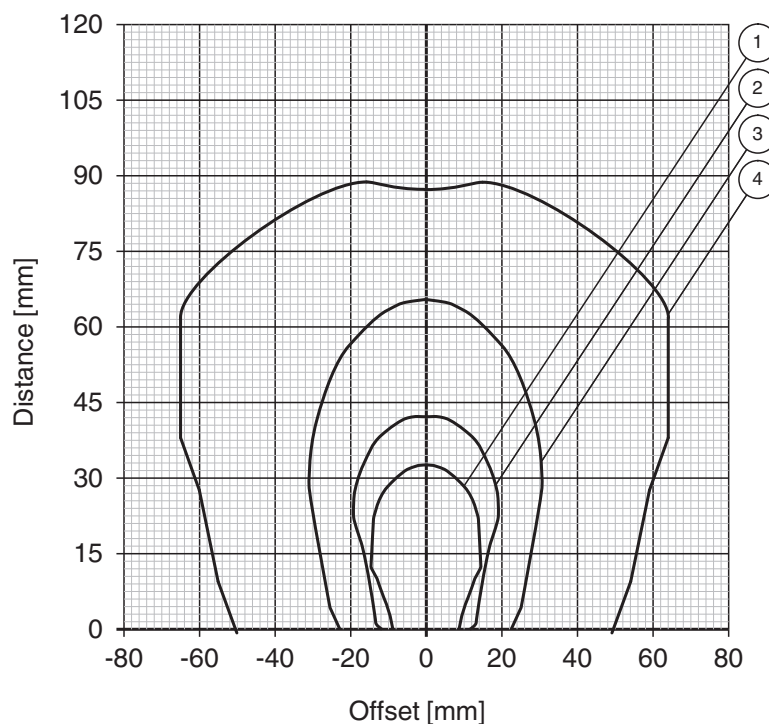

- ① IQH1-18GM-V1 ② IQH1-F61-V1 ③ IQH1-FP-V1
④ IQH1-F15-V1

Application

The transponder can be read from either side.

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 321574_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**