





Female connector DT2S-G-BK10M-PUR/0,75

- Hard-wearing PUR cable
- Degree of protection IP68
- Free from substances that impair paint wetting
- Resistant to microbes and hydrolysis
- UV resistant
- Oil resistant
- Snap locking

Female cordset single-ended Deutsch socket straight, 2-pin, PUR cable black

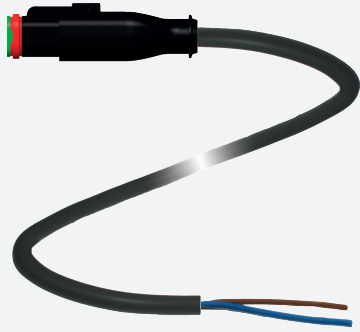

Dimensions

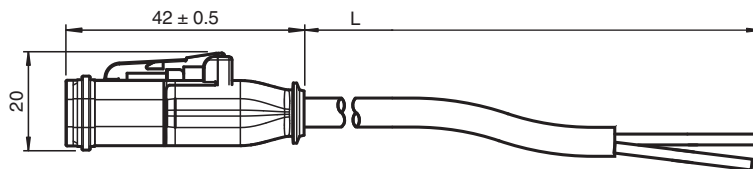

Technical Data

General specifications

Connector 1			
Connection		socket	
Construction type		Deutsch connectors	
Style		straight	
Locking		Snap locking	
Number of pins		2	
Connector 2			
Connection		cable end	

Electrical specifications

Operating voltage	U _B	max. 48 V AC / 60 V DC
Operating current	I _B	max. 8 A Per contact

Conformity

Degree of protection	EN 60529
Halogen-free	IEC 60754-1
Oil resistance	IEC 60881:404

Ambient conditions

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 70116633_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Ambient temperature		
Plug connector		-40 ... 125 °C (-40 ... 257 °F)
Cable, fixed		-40 ... 85 °C (-40 ... 185 °F)
Cable, flexing		-25 ... 85 °C (-13 ... 185 °F)
Pollution degree		3
Mechanical specifications		
Plug connector		
Loosening protection		available
Degree of protection		IP68
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter		5 mm
Bending radius		> 8 x cable diameter, moving > 4 x cable diameter, fixed
Sheath stripping force		max. 50 N / 300 mm
Sheath color		black (similar to RAL 9005)
Number of cores		2
Core cross-section		0.75 mm ² / 18 AWG
Cores color		Core 1: brown Core 2: blue
Core construction		42 x 0.15 mm Ø
Length	L	10 m
Cable code		Li 9Y 11Y 2 x 0.75
Material		
LABS free		yes
Halogen-free		yes
Plug connector		
Body		PA, black
Contact surface		Ni
Flammability		V-2
Cable		
Sheathing		PUR based on polyether
Core insulation		PP
UV resistance		yes
Chemical resistance		good
Oil resistance		yes
Microbial resistance		yes
Hydrolysis resistance		yes

Connection Assignment



1) BN
2) BU