

overview

- Outstanding reliability and unrivalled immunity against ambient light
- Linear beam for complete detection of irregular, perforated objects
- Precise detection thanks to laser light source
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Robust housing with stainless steel spacer sleeves



Technical data


general data		electrical data	
type	background suppression	voltage supply range +Vs	10 ... 30 VDC
version	line beam	current consumption max. (no load)	20 mA (@ 10 VDC)
light source	pulsed red laser diode	current consumption typ.	10 mA (@ 24 VDC)
sensing distance Tw	20 ... 120 mm	voltage drop Vd	< 2 VDC
sensing range Tb	3 ... 122 mm	output function	light / dark operate
smallest object recognizable typ.	8 mm at 60 mm	output circuit	NPN complementary
alignment / soiled lens indicator	flashing output indicator	output current	< 50 mA
power on indication	LED green	short circuit protection	yes
output indicator	LED yellow	reverse polarity protection	yes
sensing distance adjustment	qTeach	mechanical data	
laser class	1	width / diameter	8 mm
distance to focus	60 mm	height / length	25,1 mm
wave length	680 nm	depth	15,8 mm
suppression of reciprocal influence	yes	type	rectangular
beam type	line	mechanical mounting	sleeve smooth (stainless steel)
alignment optical axis	< 1,5°	housing material	plastic (ASA, PMMA)
electrical data		front (optics)	PMMA
response time / release time	≤ 2 ms	connection types	flylead connector M8 4 pin, L=200 mm
jitter	≤ 2 ms	cable characteristics	PVC / PVC 4 x 0,08 mm ²
		ambient conditions	
		operating temperature	-20 ... +50 °C
		protection class	IP 67

O200.GL-NV1T.72NV/E022_F060


Diffuse sensors with background suppression - miniature

Article number: 11231147

dimension drawing

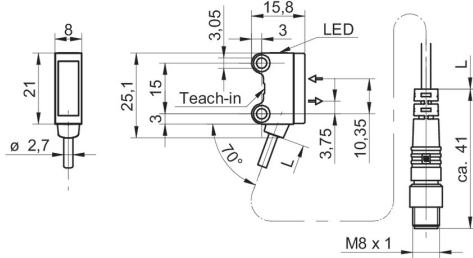

connection diagram

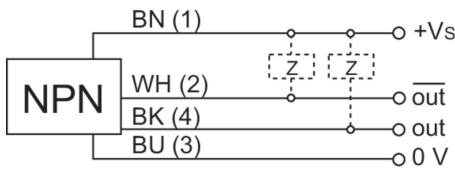


laser warning

**CLASS 1 LASER
PRODUCT**


IEC 60825-1/2014

Complies with 21 CFR 1040.10 and 1040.11
except for deviations pursuant to laser
notice No. 50, dated June 24, 2007


pin assignment



beam characteristic (typically)

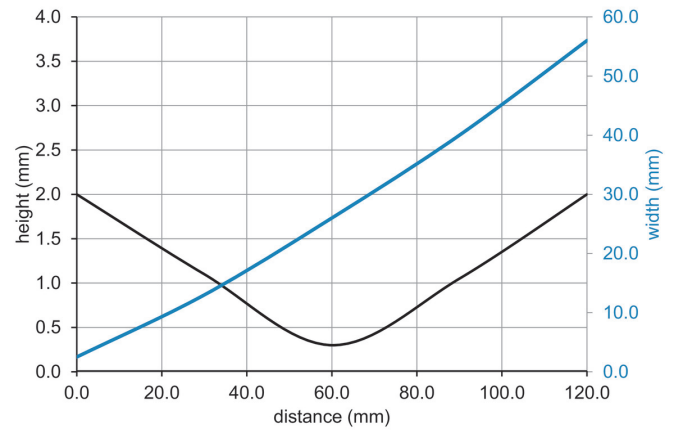

sensing distance diagram

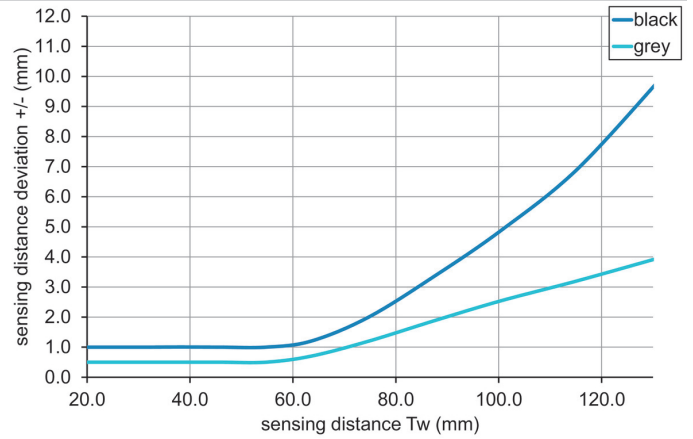

hysteresis curve

