



Two switching points

Monitoring sensor for gases and fluids




Fast and easy programming

Two independent switching points

7-segment display

Display rotatable

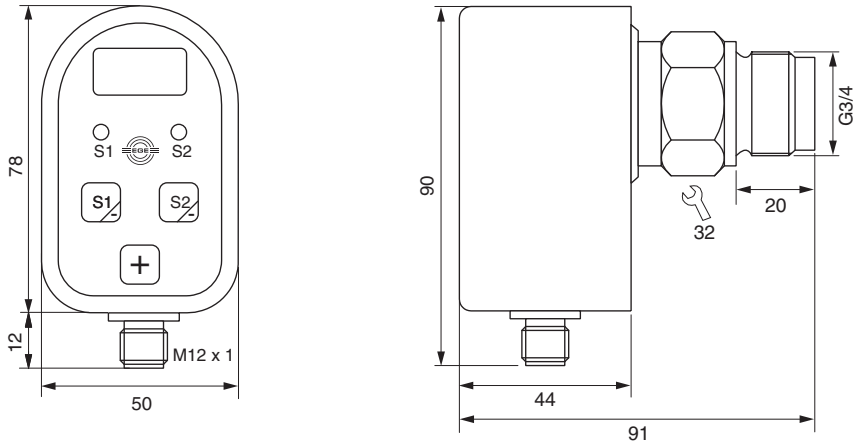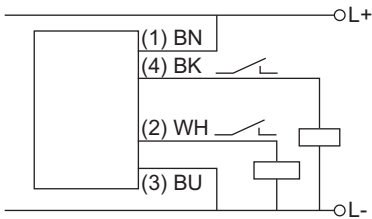

Design		DC PNP • G3/4	
Dimensions			
Sensing range	[bar]	0...1 relative	0...16 relative
Output		2 x  PNP NO	
ID-No.		P72014	P72015
Type		DN 752 GPP-01	DN 752 GPP-16
Supply voltage	[V]	24 DC ±20%	
Switching current	[mA]	200	
Current consumption	[mA]	<50	
Ambient temperature	[°C]	-20...+70	
Medium temperature	[°C]	-20...+80	
Compressive strength	[bar]	5	48
Sensor material		AISI 316 Ti	
Material gauge head		Ceramic	
Sealing material		FPM	
Housing material		PBT	
Protection	[EN 60529]	IP 65	
Connection		M12 connector	
 1: BN 2: WH 3: BU 4: BK			
Accessories	Connecting cable type SLG 4-2 (Z00445)		