

XURK1KSMM12

photoelectric sensor - diffuse - Sn 9 mm - NO or NC - M12 connector



Main

Range of product	OsiSense XU
Series name	Application packaging
Electronic sensor type	Photo-electric sensor
Sensor name	XUR
Sensor design	Compact
Detection system	Diffuse
Emission	Red or green
[Sn] nominal sensing distance	18 Mm spot 2 x 7 mm need lens XURZ01 7 Mm spot 1 x 4 mm need lens XURZ02 9 mm spot 1.5 x 5 mm without lens
Material	Metal
Switching frequency	<= 10 kHz
Type of output signal	Discrete Analogue
Supply circuit type	DC
Wiring technique	3-wire
Discrete output type	PNP or NPN
Discrete output function	1 NO or 1 NC programmable
Analogue output range	0...5.5 V, DC
Electrical connection	1 male connector M12 adjustable 3 positions, 4 pins
Product specific application	Colour mark
Sale per indivisible quantity	1

Complementary

Enclosure material	Zinc alloy
Lens material	Glass
Minimum width of mark detected	0.5 mm
Maximum inclination of reader	20 °
Maximum passing speed of object	10 m/s, minimum detected mark width: 1 mm
Output type	Solid state
Output function governance	Light or dark programmable
Add on output	With analogue output
Status LED	Output state: 1 LED (red)
[Us] rated supply voltage	12...24 V DC with reverse polarity protection
Supply voltage limits	DC
Switching capacity in mA	<= 200 mA (overload and short-circuit protection)
Maximum voltage drop	<1 V (closed state), NPN <2 V (closed state), PNP
Current consumption	<= 80 mA no-load
Time delay range	20 ms off-delay activation/deactivation by internal switch delay
Maximum delay first up	100 ms
Maximum delay response	0.05 ms
Maximum delay recovery	0.05 ms
Setting-up	Sensitivity adjustment with teach mode
Depth	58 mm
Height	82 mm

Width	31 mm
Net weight	0.55 kg

Environment

Product certifications	CE
Ambient air temperature for operation	-10...55 °C
Ambient air temperature for storage	-20...70 °C
Vibration resistance	7 gn, amplitude = +/- 0.6 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 11 ms) conforming to IEC 60068-2-27
IP degree of protection	IP67 conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	328 g
Package 1 Height	5 cm
Package 1 width	8.5 cm
Package 1 Length	13.5 cm
Unit Type of Package 2	S02
Number of Units in Package 2	21
Package 2 Weight	7.37 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

mm
in.

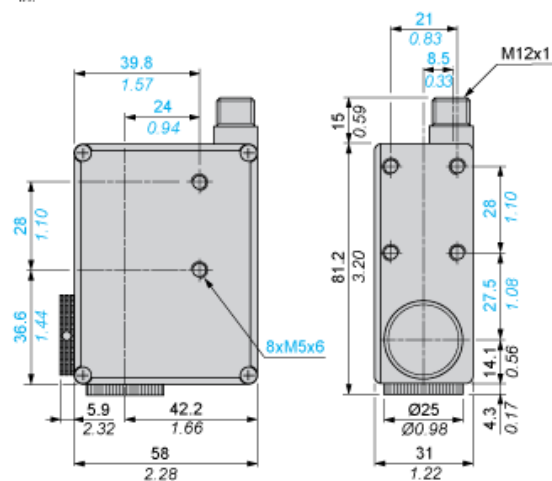

Wiring Schemes

Connector Scheme



1/ 10...30 VDC

Brown :

2/ Adjustment input

White :


3/ 0 V

Blue :

4/ Output

Black :


PNP or NPN Programmable



$R = 2.2 \text{ k}\Omega$


Curves

Detection Curve

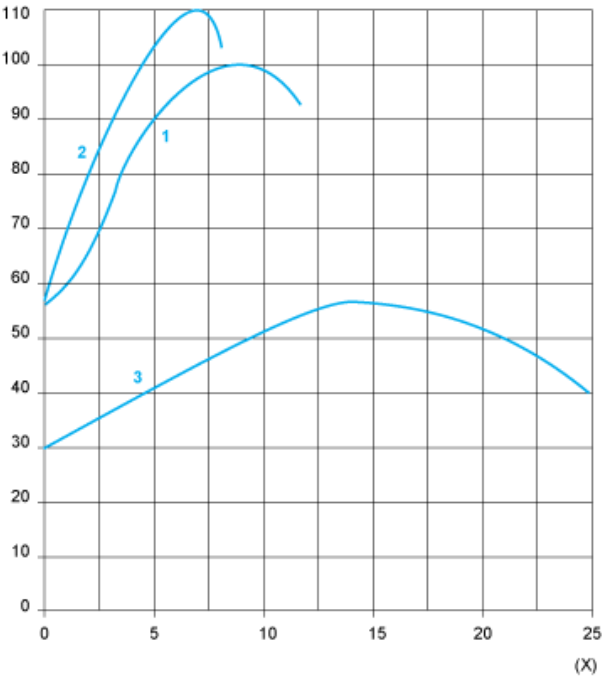


- (x) Distance (mm)
1 : XURK●●●●●●●●
2 : With XURZ01
3 : With XURZ02

Detection Zone and Spot Size (mm)



	a	b	c
	9	9	1.5
With XURZ01	18	7	2
With XURZ02	7	4	1

Vertical Inclination



An angle of 5 to 10° from vertical is recommended for reflective or transparent surfaces Maximum vertical inclination: 20°