

# Temperature Sensor with IO-Link

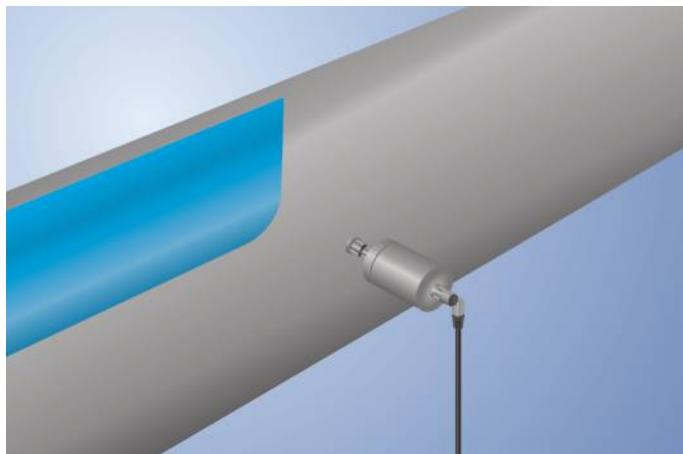
## FXTT010

Part Number



- FDA compliant
- Ready for Industry 4.0 with IO-Link 1.1
- Response time T90: < 2 seconds
- Temperature measuring range: -50 ... +150° C

weFlux<sup>2</sup> Temperature Sensors ensure precise temperature measurement of liquids and gases in closed piping systems. Either 2 switching outputs, 1 switching output and 1 analog output or one 2-wire analog output is available depending on settings and connection configuration. The outputs can be configured as desired via IO-Link in order to flexibly adapt the sensors to the respective application.



### Technical Data

#### Sensor-specific data

Temperature Measurement Range	-50...150 °C
Adjustable Range	-50...150 °C
Medium	Liquids, gases
Measuring error	± 0,5 °C
Resolution	0,01 °C
Response Time	< 2 s

#### Environmental conditions

Temperature of medium	-50...150 °C
Ambient temperature	-25...80 °C
Storage temperature	-25...80 °C
Mechanical Strength	25 bar
EMC	DIN EN 61326-1
Shock Resistance	IEC 60751
Vibration resistance	IEC 60751

#### Electrical Data

2-wire supply power	12...32 V DC
3-wire supply power	12...32 V DC
Current Consumption (Ub = 24 V)	< 15 mA
Switching Outputs	2
Switching Output/Switching Current	± 100 mA
Switching Output Voltage Drop	< 1,5 V DC
Analog Output	0...10 V/4...20 mA
Current Output Load Resistance	(Ub-Ubmin)/0,02A
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III
Interface	IO-Link V1.1

#### Mechanical Data

Setting Method	IO-Link
Housing Material	1.4404
Material in contact with media	1.4404
Degree of Protection	IP68/IP69K *
Connection	M12 × 1; 4-pin
Process Connection	Clamp diameter: 34 mm
Process Connection Length (PCL)	46 mm
Probe Length (PL)	32 mm

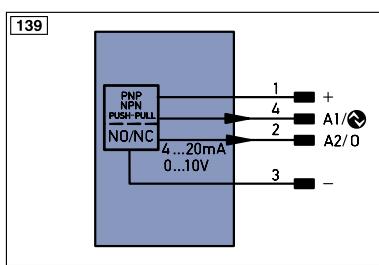
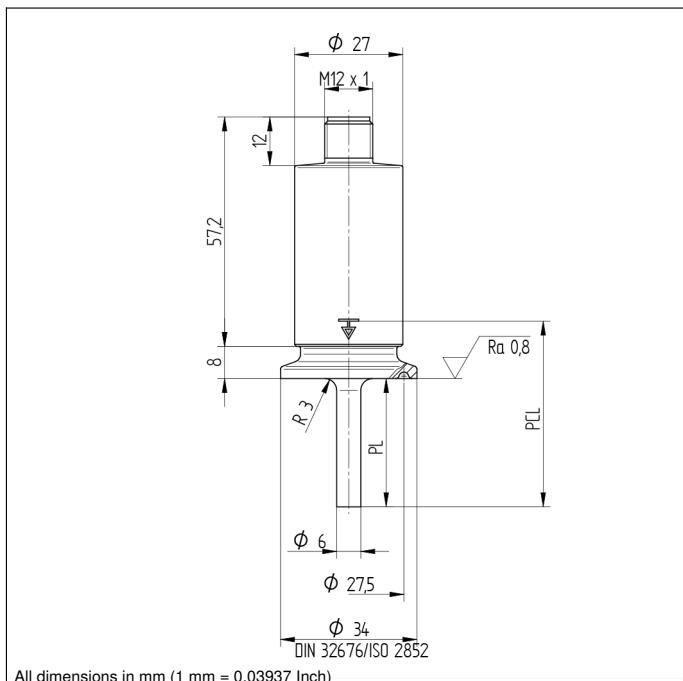
Analog Output	●
Configurable as PNP/NPN/Push-Pull	●
Switchable to NC/NO	●
IO-Link	●
Connection Diagram No.	139
Suitable Connection Technology No.	21

\* Tested by wenglor

### Complementary Products

IO-Link Master

wTeach2 software DNNF005


**Legend**

+	Supply Voltage +
-	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
V̄	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
IO-Link	IO-Link
PoE	Power over Ethernet
IN	Safety Input
OSD	Safety Output
Signal	Signal Output
BL-D	Ethernet Gigabit bidirect. data line (A-D)
EN <sub>RS422</sub>	Encoder 0-pulse 0-0 (TTL)
EN <sub>RS422</sub>	Encoder A/A (TTL)
EN <sub>RS422</sub>	Encoder B/B (TTL)

PT	Platinum measuring resistor
nc	not connected
U	Test Input
Ū	Test Input inverted
W	Trigger Input
O	Analog Output
O-	Ground for the Analog Output
BZ	Block Discharge
AVV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
E+	Receiver-Line
S+	Emitter-Line
÷	Grounding
SnR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contactor Monitoring
EN <sub>RS422</sub>	Encoder A/A (TTL)
EN <sub>RS422</sub>	Encoder B/B (TTL)

 Wire Colors according to  
DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GN/YE	Green/Yellow

