




Indicative image




M18 CYLINDRICAL INDUCTIVE SENSORS


- Wide range of models: standard, long distance
- Output: cable, M12 and plug cable exit
- Models with 2, 3, and 4 wires
- ATEX models, cat. 3, available on request
- Models with complementary output (NO+NC)

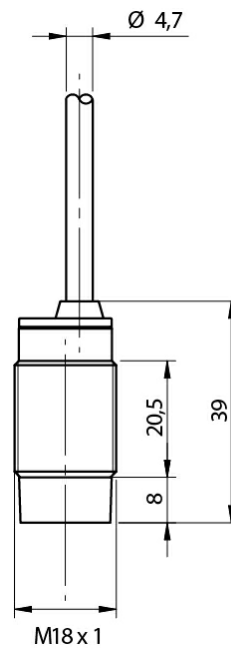

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

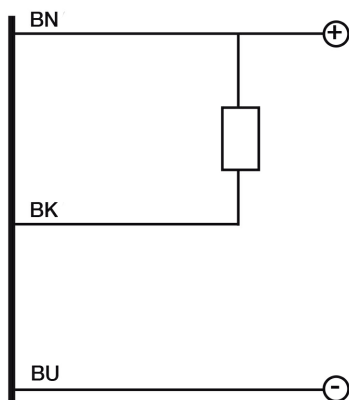


INSTALLATION

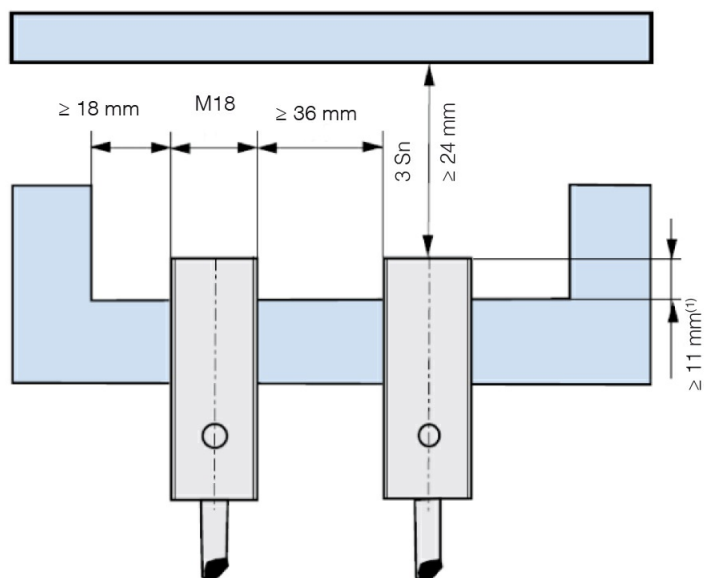

⁽¹⁾ $\geq 6 \text{ mm}$ for non magnetic materials

RESPONSE CURVES

Parallel offset

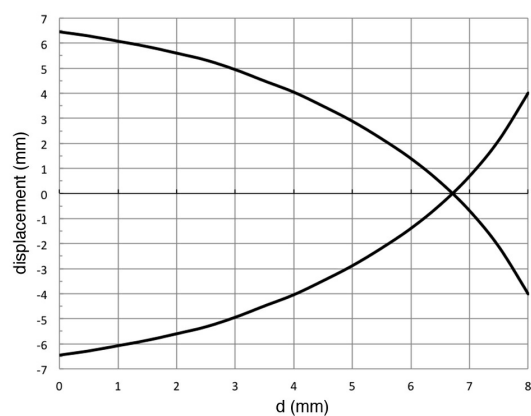

Datasensing S.r.l.

Strada S. Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 05:31:47