

## Metal cylindrical shape photoelectric sensors **PR18G** series



### Features

- ◆ Through beam reflection working principle;
- ◆ Excellent anti-interference performance
- ◆ High detection accuracy




### Part number

		Emitter	Receiver			Emitter	Receiver
AC 2 wires	NO	PR18G-TM10A	PR18G-TM10ATO	AC 2 wires	NC	PR18G-TM10A	PR18G-TM10ATC

### Technical specifications

Detection type	Through beam	Consumption current	≤3mA
Rated distance [Sn]	10m (non-adjustable)	Circuit protection	.....
Standard target	> φ15mm opaque object	Response time	< 50ms
Light source	Infrared LED (880nm)	Output indicator	Emitter: Green LED    Receiver: Yellow LED
Dimensions	M18*83.5mm	Ambient temperature	-15°C...+55°C
Output	NO/NC (depends on receiver)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	20...250 VAC	Voltage withstand	2000V/AC 50/60Hz 60s
Min target	.....	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	.....	Vibration resistance	10...50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP65
Load current	≤300mA (receiver)	Housing material	Nickel-copper alloy
Residual voltage	≤10V (receiver)	Connection type	2m PVC cable

### Dimensions

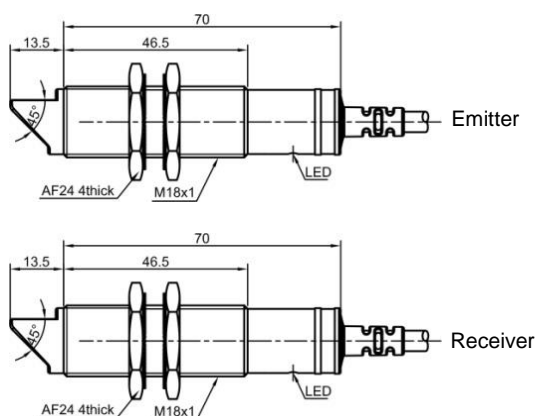

### Wiring diagram

