


CD12M/0H-100A5

CD



Indicative image

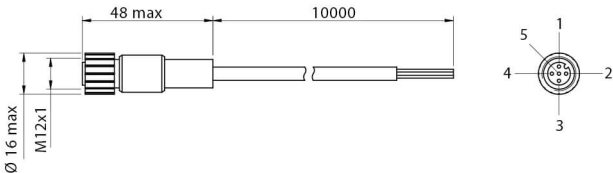

Electrical data

Nominal current	4 A
Led	No
Wires	5
Nominal voltage	60 V

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-5°C ÷ +70°C (flexible installation)-30°C ÷ +80°C (fixed installation)
1	10
Head type	Axial
Plug	M12
Outer diameter	Ø 4,5 mm ± 5%
Jacket material	TPU
Wire isolation	TPU
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	Femmina

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature

-5°C ÷ +70°C (flexible installation)-30°C ÷ +80°C (fixed installation)

Mechanical Protection

IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1

WH/2

BU/3

BK/4

GY/5

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 12:55:38