


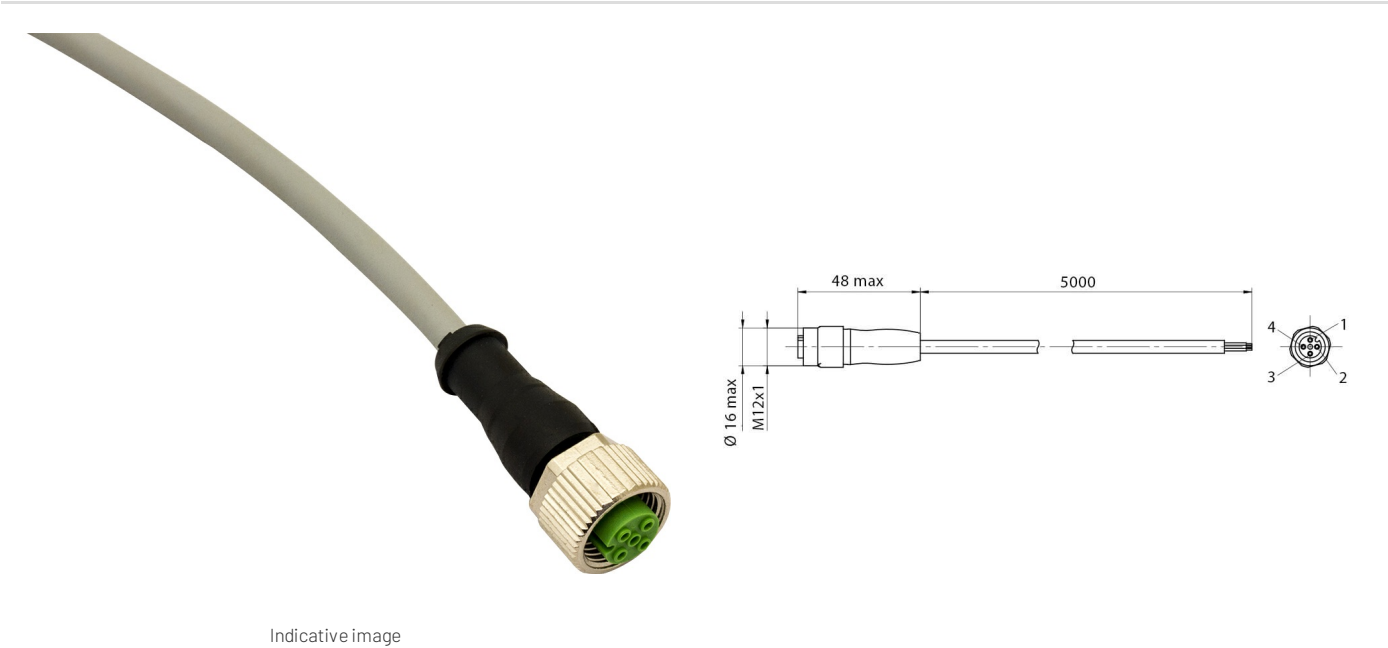

Indicative image

Electrical data

Nominal current	4 A
Led	no
Wires	4
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-5°C ÷ +70°C (flexible installation)-25°C ÷ +70°C (fixed installation)
1	5
Head type	Axial
Plug	M12
Outer diameter	Ø 5,2 mm ± 5%
Jacket material	PUR/PVC
Wire isolation	PVC
Bending radius	Wire for fixed installation: 10 x d Wire for flexible installation: 15 x d
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	Female

Test/Approvals

Approvals

cCSAus

Degree of protection

IP67

Generical Data

Operating Temperature

-5°C ÷ +70°C (flexible installation)-25°C ÷ +70°C (fixed installation)

Mechanical Protection

IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1

WH/2

BU/3

BK/4

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 12:46:50