

K6

Part Number



Technical Data

Optical Data

Fiber Core Diameter	1 mm
Fiber Core	PMMA
Fiber	Step Index
Fiber Distribution	parallel arrangement
Range with Sensor Type	350 mm
Opening Angle	55 °

Mechanical Data


Temperature Range	-40...85 °C
Bending Radius	30 mm
Fiber-Optic Length	2 m
Jacket Material	PE (black)
Material End Sleeve	Stainless Steel
Jacket Diameter	2,2 mm
Light Emission	straight

Complementary Products


Lens LA2

- Especially suitable in applications where only minimal space is available
- Fiber-optic cable can be cut to length by the cutting tool

The plastic fiber-optic cables are very flexible and can be especially used in applications where minimal space is available. Plastic fiber-optic cables are provided in standard length of 2 meters. Special lengths up to 50 meters are available as well. Plastic fiber-optic cables can be cut to length by the user with the help of the cutting tool Z0015.

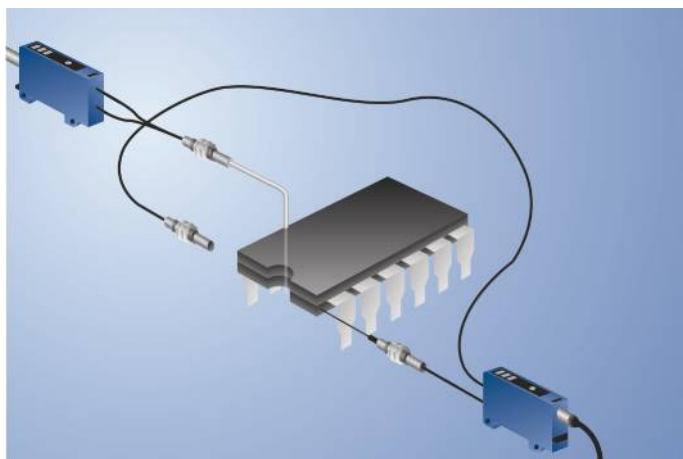

K6

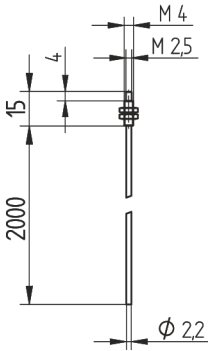

All dimensions in mm (1 mm = 0.03937 Inch)

