



Model Number

UB2000-30GM-H3


Single head system

Features

- Separate evaluation
- Direct detection mode

Diagrams

Characteristic response curves

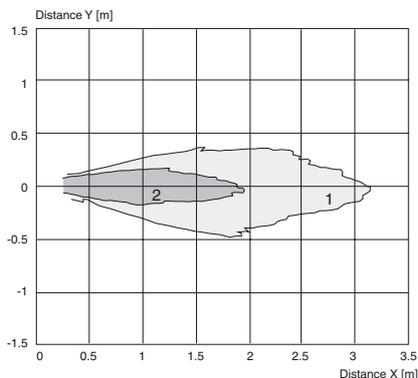

Curve 1: flat surface 100 mm x 100 mm
Curve 2: round bar, Ø 25 mm

Technical data

General specifications

Sensing range	80 ... 2000 mm
Adjustment range	120 ... 2000 mm
Dead band	0 ... 80 mm ¹⁾
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 180 kHz

Electrical specifications

Operating voltage U_B	10 ... 30 V DC, ripple 10 % _{SS}
No-load supply current I_0	≤ 30 mA

Input

Input type	1 pulse input for transmitter pulse (clock) 0-level (active): < 5 V ($U_B > 15$ V) 1-level (inactive): > 10 V ... $+U_B$ ($U_B > 15$ V) 0-level (active): < 1/3 U_B (10 V < $U_B < 15$ V) 1-level (inactive): > 2/3 U_B ... $+U_B$ (10 V < $U_B < 15$ V)
Pulse length	20 ... 300 µs (typ. 200 µs) ²⁾
Pause length	≥ 50 x pulse length
Impedance	10 kOhm internal connected to $+U_B$

Output

Output type	1 pulse output for echo run time, short-circuit proof open collector PNP with pulldown resistor = 22 kOhm level 0 (no echo): $-U_B$ level 1 (echo detected): ≥ $(+U_B - 2$ V)
Rated operating current I_e	15 mA, short-circuit/overload protected
Temperature influence	the echo propagation time: 0.17 % / K

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Degree of protection	IP67
Connection	2 m PVC cable 0.75 mm ²
Material	
Housing	nickel plated brass; plastic components: PBT
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Mass	300 g


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007+A1:2012 IEC 60947-5-2:2007 + A1:2012

Approvals and certificates

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V


Dimensions

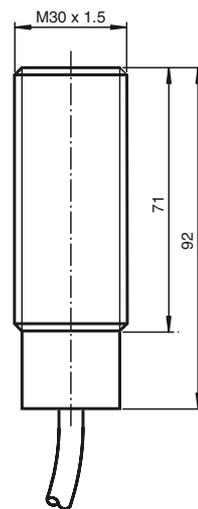

Release date: 2016-12-05 11:55 Date of issue: 2016-12-05 130474_eng.xml

Electrical Connection

Standard symbol/Connection:
(Transceiver)



WH = Emitter pulse input
BK = Echo propagation time output

Accessories

BF 30
Mounting flange, 30 mm

BF 30-F
Mounting flange with dead stop, 30 mm

BF 5-30
Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm


UVW90-M30
Ultrasonic -deflector

UVW90-K30
Ultrasonic -deflector


Function

The sensing range is determined in the downstream evaluation electronics such as PLC modules or other existing evaluation units.

The object distance in pulse-echo mode is obtained from the echo time Δt . The emission of an ultrasonic pulse starts simultaneously with the falling slope of the clock input signal.



We recommend the usage of a npn-transistor to trigger the sensors clock input. The sensors clock input is connected to the $+U_B$ potential internally by means of a pull up resistor.

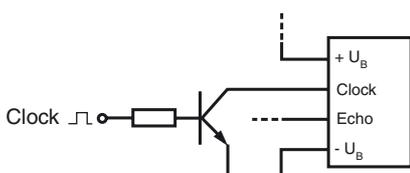

- 1) The unusable area (blind range) BR depends on the pulse duration T_i .
The unusable area reaches a minimum with the shortest pulse duration.
- 2) The sensors detection range depends on the pulse duration T_i .
With pulse duration $<$ typical pulse duration, the sensors detection range may be reduced.

Mounting conditions

If the sensor is installed in places where the operating temperature can fall below 0 °C, the BF30, BF30-F or BF 5-30 fixing clamp must be used.

Release date: 2016-12-05 11:55 Date of issue: 2016-12-05 130474_eng.xml