


CD12M/0H-100C5

CD



Indicative image

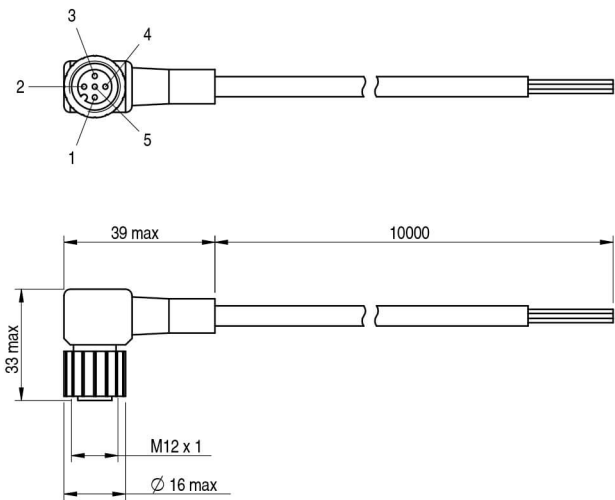

Electrical data

Nominal current	4 A
Led	no
Wires	5
Nominal voltage	60 V

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-5°C ÷ +70°C (flexible installation)-30°C ÷ +80°C (fixed installation)
1	10
Head type	90°
Plug	M12
Outer diameter	Ø 4.5 mm ± 5%
Jacket material	TPU
Wire isolation	TPU
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	Femmina


Test/Approvals

Generical Data

Operating Temperature -5°C ÷ +70°C (flexible installation)-30°C ÷ +80°C (fixed installation)

Mechanical Protection IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

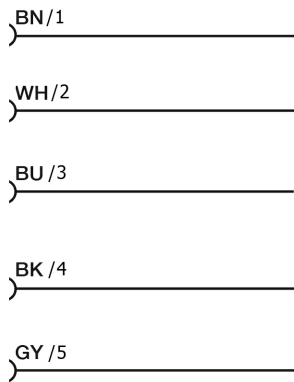

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 12:56:11