


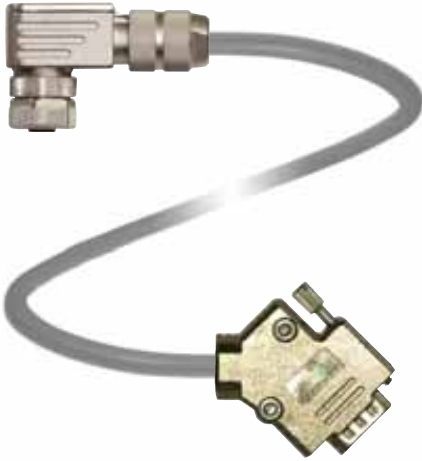

Model Number


V19-W-1M-PUR-ABG-SUBD9-W-Y

Connecting cable, M12 to SUB-D, PUR cable, 8-pin, shielded

Features

- Iris spring screening
- Metal housing
- Halogen-free
- Shield attached to coupling nut
- Bus termination resistor
- Twisted pair

Dimensions

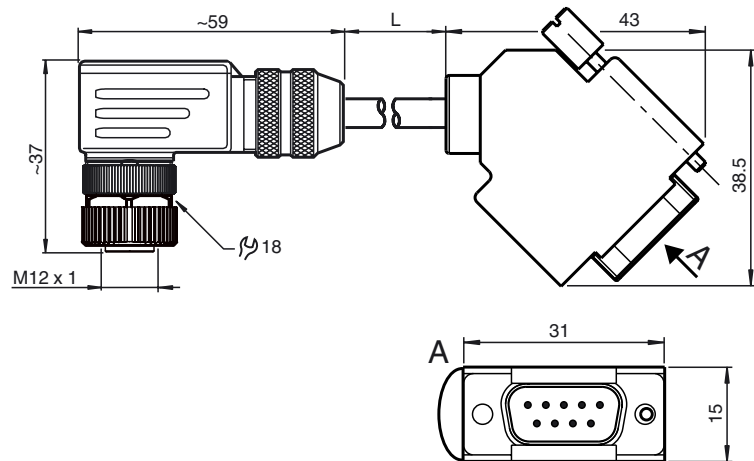

Technical data

General specifications

Number of pins	8 + shield
Connection 1	socket
Construction type 1	right angle
Threading 1	M12
Connection 2	Male connector
Construction type 2	right angle
Threading 2	Sub-D

Electrical specifications

Operating voltage	U_B	max. 30 V AC/DC
Test voltage		> 1500 V _{eff} AC
Operating current		max. 1.5 A
Volume resistance		< 5 mΩ

Ambient conditions

Ambient temperature	-20 ... 80 °C (-4 ... 176 °F)
Pollution Degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket, pins
Pin diameter	1 mm
Protection degree	IP20 (Sub-D connector) IP67 (M12 socket)

Material

Contacts	CuZn Ni/Au	
Contact surface	Au	
Body	Zinc die-casting, nickel-plated metallized plastic	
Cable	PUR	
Slotted nut	Zinc die-casting, nickel-plated	
Core insulation	PP	
Cable	fine-strand, flexible, twisted pair	
Sheath diameter	Ø 6 mm	
Bending radius	Cable, moving: 60 mm, Cable, fixed: 30 mm	
Color	grey	
Cores	8 x 0.25 mm ²	
Conductor construction	19 x 0.127 mm Ø	
Shield	grid covering 85 %	
Length	L	1 m
Flammability		
Contact material	94 HB	
Housing	94 V-2 / 94 V-0	

Electrical connection

