

# XS508B1PAL01M12

inductive sensor XS5 M8 - L33mm - stainless -  
Sn1.5mm - 12..24VDC -M12 - 0.15 m



## Main

|                                    |                                                         |
|------------------------------------|---------------------------------------------------------|
| Range of product                   | OsiSense XS                                             |
| Series name                        | General purpose                                         |
| Sensor type                        | Inductive proximity sensor                              |
| Device application                 | -                                                       |
| Sensor name                        | XS5                                                     |
| Sensor design                      | Cylindrical M8                                          |
| Size                               | 33 mm                                                   |
| Body type                          | Fixed                                                   |
| Detector flush mounting acceptance | Flush mountable                                         |
| Material                           | Metal                                                   |
| Type of output signal              | Discrete                                                |
| Wiring technique                   | 3-wire                                                  |
| [Sn] nominal sensing distance      | 1.5 mm                                                  |
| Discrete output function           | 1 NO                                                    |
| Output circuit type                | DC                                                      |
| Discrete output type               | PNP                                                     |
| Electrical connection              | 4 pins M12 remote male connector                        |
| Cable length                       | 0.15 m                                                  |
| [Us] rated supply voltage          | 12...24 V DC with reverse polarity protection           |
| Switching capacity in mA           | <= 200 mA DC with overload and short-circuit protection |
| IP degree of protection            | IP67 conforming to IEC 60529                            |

## Complementary

|                          |                              |
|--------------------------|------------------------------|
| Thread type              | M12 x 1                      |
| Detection face           | Frontal                      |
| Front material           | PPS                          |
| Enclosure material       | Nickel plated brass          |
| Operating zone           | 0...1.2 mm                   |
| Differential travel      | 1...15% of Sr                |
| Cable composition        | 3 x 0.11 mm <sup>2</sup>     |
| Wire insulation material | PvR                          |
| Status LED               | Output state: 1 LED (yellow) |
| Supply voltage limits    | 10...36 V DC                 |
| Switching frequency      | <= 5000 Hz                   |
| Maximum voltage drop     | <2 V (closed)                |
| Current consumption      | <= 10 mA no-load             |
| Maximum delay first up   | 10 ms                        |
| Maximum delay response   | 0.1 ms                       |
| Maximum delay recovery   | 0.1 ms                       |
| Marking                  | CE                           |
| Threaded length          | 25 mm                        |
| Height                   | 8 mm                         |
| Length                   | 33 mm                        |
| Net weight               | 0.035 kg                     |

## Environment

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Product certifications                | UL<br>CSA                                                               |
| Ambient air temperature for operation | -25...70 °C                                                             |
| Ambient air temperature for storage   | -40...85 °C                                                             |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.057 kg |
| Package 1 Height | 0.420 dm |
| Package 1 width  | 0.970 dm |
| Package 1 Length | 1.320 dm |


## Offer Sustainability

|                            |                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                          |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                            |
| RoHS exemption information | <a href="#">Yes</a>                                                                            |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                  |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                        |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

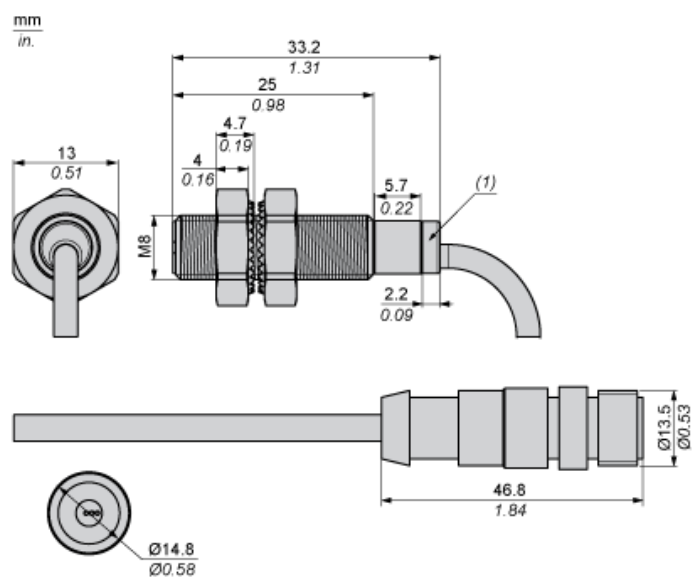


(1) LED

---

### Minimum Mounting Distances

---


Side by side



e (1) 3 mm/0.12 in.

≥


Face to face



e (2) 18 mm/0.71 in.

≥

Facing a metal object




e (3) 4.5 mm/0.18 in.


≥

## Wiring Schemes

M12 connector



PNP




- 1 : (+)
- 2 : Not connected
- 3 : (-)
- 4 : NO Output

---

Performance Curves

---

Standard Steel Target : 8x8x1 mm

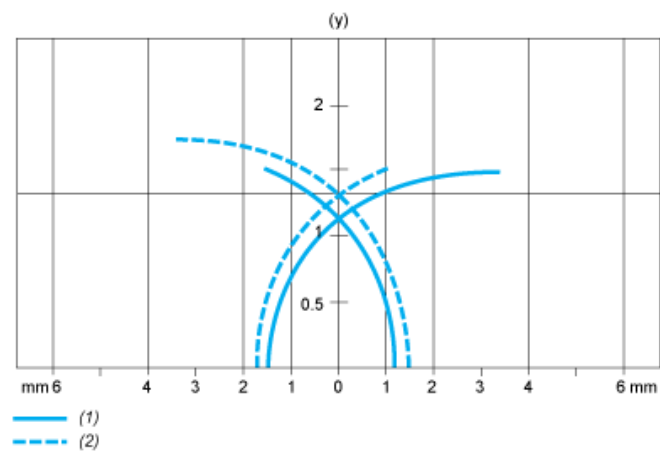

- (1) Pick-up points  
(2) Drop-out points (object approaching from the side)  
(y) Sensing distance in mm