


CD08/0A-100C5US

CD

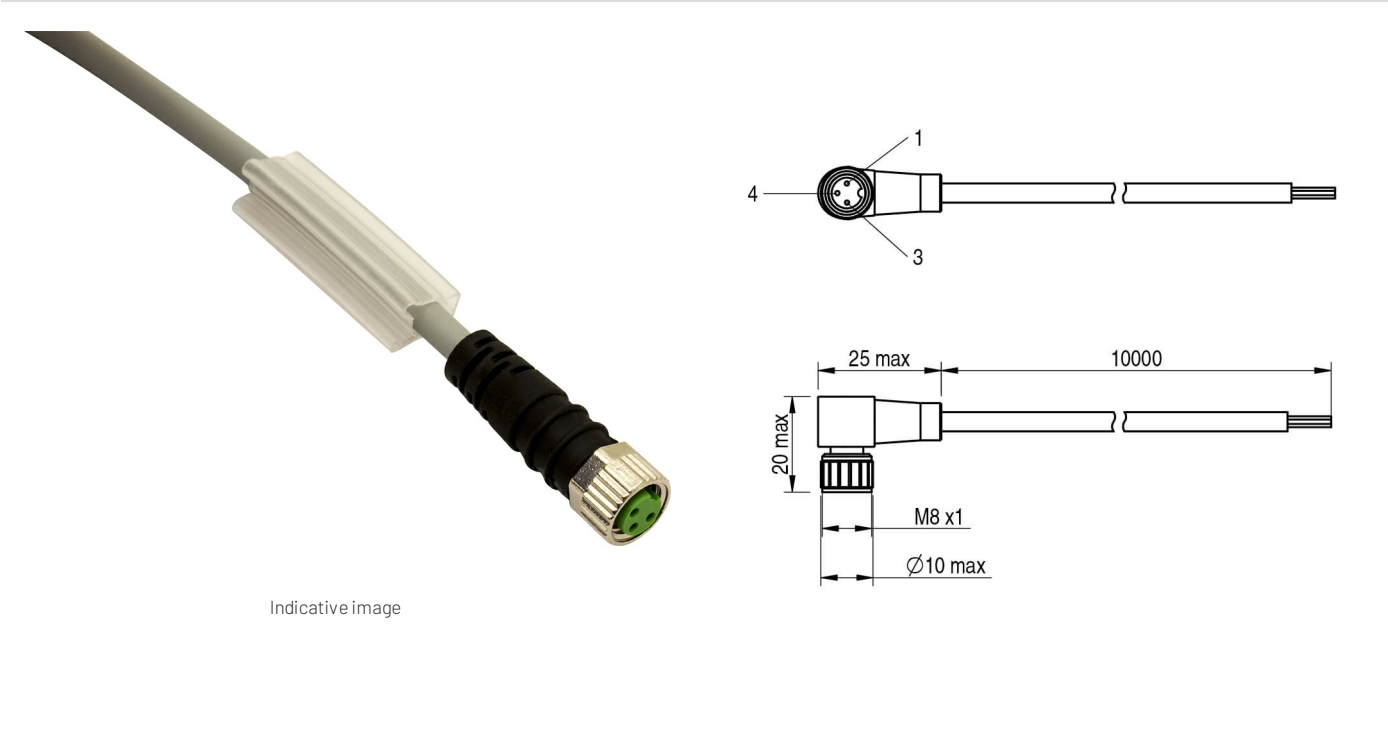

Electrical data

Nominal current	4 A
Led	no
Wires	3
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 60 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,4 Nm
Operating temperature	-25°C... +80°C (flexible installation)-25°C ... +80°C (fixed installation)
1	10
Head type	90°
Plug	M8
Outer diameter	Ø 4.1 mm ± 5%
Jacket material	PUR
Wire isolation	PP
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	Femmina

Test/Approvals

Approvals	cCSAus
-----------	--------

Degree of protection

IP67

Generical Data

Operating Temperature

-25°C... +80°C (flexible installation)-25°C ... +80°C (fixed installation)

Mechanical Protection

IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1

BU/3

BK/4

Datasensing S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@datasensing.com

date of printing

29/04/2022 12:30:10