


CD12M/PA-020C1

CD

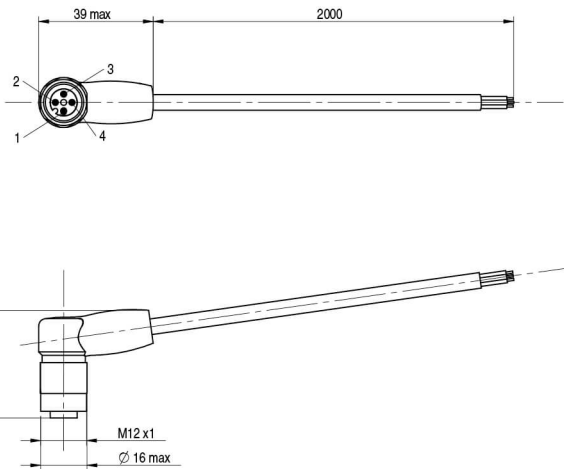

Indicative image

Electrical data

Nominal current	4 A
Led	2 (Supply - PNP output pin 4)
Wires	3
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	=10°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
1	2
Head type	90°
Plug	M12
Outer diameter	Ø 4.5 mm ± 5%
Jacket material	PVC CEI 2022 II OR
Wire isolation	PVC
Conductors section	0,25 mm2 (32 x 0,10 mm2)

Model

Femmina

Test/Approvals

Degree of protection

IP67

Generical Data


Operating Temperature

=10°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)

Mechanical Protection

IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS



Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 13:05:49