
## **Baumer**

## **Diffuse contrast sensors**

## **OZDK 14P1901**

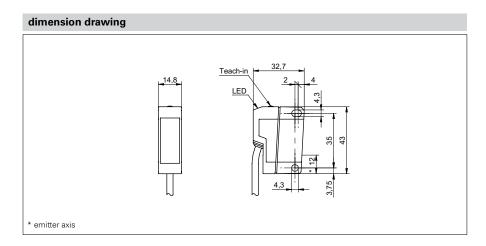

general data	
type	diffuse contrast sensor
light source	pulsed red laser diode
sensing distance Tw	20 300 mm
optimum operating distance	40 60 mm
repeat accuracy	< 0,2 mm at laser focus
alignment / soiled lens indicator	flashing light indicator
power on indication	LED green
light indicator	LED yellow
sensitivity adjustment	Teach-in
laser class	2
distance to focus	115 mm
wave length	650 nm

electrical data	
response time / release time	< 0,15 ms
voltage supply range +Vs	10 30 VDC
current consumption max. (no load)	35 mA
current consumption typ.	25 mA
voltage drop Vd	< 2,2 VDC
output function	light operate
output circuit	PNP
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

mechanical data	
width / diameter	14,8 mm
height / length	43 mm
depth	31 mm
type	rectangular
housing material	plastic (ASA, MABS)
front (optics)	PMMA
connection types	cable 4 pin, 2 m

ambient conditions	
operating temperature	-10 +50 °C
protection class	IP 67





