



T4V7H 355-12ZUE

- Metal enclosure
- 66,7 mm x 76 mm x 38 mm
- only for positioning tasks
- Mounting details to EN 50041
- Switching points to EN 50041
- 3 cable entries lateral M 20 x 1.5
- Wide range of alternative actuators
- Good resistance to oil and petroleum spirit
- Actuator heads can be repositioned by 4 x 90°

Data

Ordering data

T4V7H 355-12ZUE

101148300

eCl@ss number, Version 9.0

27-27-06-01

General data

Product name	T 355 roller lever 7H
Housing construction form	Norm construction design
Enclosure material	Aluminium
Enclosure coating material	painted
Material of the contacts, electrical	Silver
Lever material	Metal film
Roller material	Plastic
Gross weight	319 g

General data - Features

Number of auxiliary contacts	1
Number of safety contacts	2

Safety appraisal

BG-GS-ET-15
ISO 13849-1
EN 60947-5-1

Mission Time 20 Year(s)

Safety appraisal - Safety outputs

B10d Normally-closed contact (NC) 20,000,000 Operations

Mechanical data

Actuating element Roller lever
Mechanical life, minimum 30,000,000 Operations
Actuating speed, maximum 2.5 m/s
Note (Actuating speed) Actuating speed with actuating angle 30° to switch axis
Note (Switchover time) Switchover time in accordance with actuating speed
Actuating torque, minimum 0.3 Nm

Mechanical data - Connection technique

Terminal Connector Screw connection
0.75 mm²
2.5 mm²
Note (Cable section) All indications about the cable section are including the conductor ferrules.

Mechanical data - Dimensions

Height of sensor 183 mm
Length of sensor 57.3 mm
Width of sensor 40.5 mm

Ambient conditions

IP67
Ambient temperature, minimum -30 °C
Ambient temperature, maximum +80 °C

Ambient conditions - Insulation value

Rated impulse withstand voltage 4 kV

Electrical data

Thermal test current 10 A
Required rated short-circuit current to EN 60947-5-1 1,000 A
Utilisation category AC-15 230 VAC
Utilisation category AC-15 4 A

Utilisation category DC-13	24 VDC
Utilisation category DC-13	4 A
Switching element	NO contact, NC contact
Switching principle	Slow action with overlapping contacts
Bounce duration, maximum	2 ms
Switching frequency	5,000 /h

Ordering code

Product type description:

(1)(2) 3(3)5-(4)Z(5)-(6)-(7)-(8)-(9)

(1)

Z Snap action

T Slow action (not available for AF/S)

(2)

S Plunger S

R Roller plunger R

H Roller lever H

10H Rod lever 10H

7H Roller lever 7H

1K Offset roller lever 1K

3K Angle roller lever 3K

RMS Brass roller

(3)

3 slim design

5 large design

(4)

11 1 NO contacts/1 NC contact

02 2 NC contact

20 2 NO contacts (not suitable for safety applications)

01/01 1 NC contact left / 1 NC contact right

12 1 NO contact/2 NC contacts

03 3 NC contact

(5)

H Slow action with staggered contacts

UE Slow action with overlapping contacts

(6)


G24 with LED

without	Cable entry M20
NPT	Cable entry NPT 1/2"
ST	M12 connector with A-coding (Caution! According to EN 60204-1, the versions with connector must only be used in PELV circuits.)
ST-2310	M12 connector with B-coding (Caution! According to EN 60204-1, the versions with connector must only be used in PELV circuits.)

2138 Roller lever 7H for position switches with safety function

1637 Gold-plated contacts


Photo/Product/Catalogue

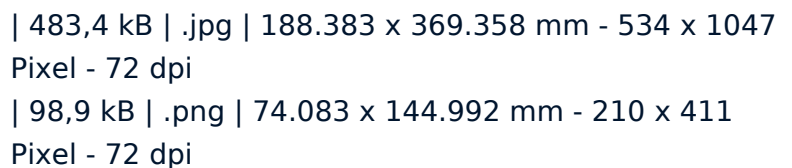

| 10,6 kB | .png | 74.083 x 51.506 mm - 210 x 146
Pixel - 72 dpi
| 132,5 kB | .jpg | 352.778 x 245.181 mm - 1000 x 695
Pixel - 72 dpi
| 32,9 kB | .cdr |

| 24,3 kB | .cdr |
| 2,5 kB | .png | 74.083 x 29.633 mm - 210 x 84 Pixel -
72 dpi
| 62,6 kB | .jpg | 352.778 x 141.817 mm - 1000 x 402
Pixel - 72 dpi

Graphic/Product/Contact




ID: k2o1sk02

| 18,4 kB | .cdr |

| 82,3 kB | .jpg | 352.778 x 193.322 mm - 1000 x 548

Pixel - 72 dpi

Dimension/Product/Actuator



ID: 1h355g02

| 30,2 kB | .cdr |

| 104,9 kB | .jpg | 352.778 x 243.769 mm - 1000 x 691

Pixel - 72 dpi

| 9,6 kB | .png | 74.083 x 51.153 mm - 210 x 145 Pixel
- 72 dpi

K.A. Schmersal GmbH & Co. KG, Möddinghofe 3, D-42279 Wuppertal

The details and data referred to have been carefully checked. Images may diverge from original. Further technical data can be found in the manual. Technical amendments and errors possible.

Generated on 122021-01-31T05:07:12+01:000501Europe/BerlinSun, 31 Jan 2021 05:07:12

+010012amSunday.31am31Europe/BerlinCET0701Europe/BerlinJanuary2021Sun, 31 Jan 2021 05:07:12

+010001am31