

U shape photoelectric sensor PU05M series



Feature description

- The power supply voltage is 5...24VDC, and the voltage range is wide
- A variety of shapes, rich product categories
- The product has two modes: L/ON and D/ON
- Use flexible wire with good flexibility




Model specification

NPN	PU05M-TGNR-K	PNP	PU05M-TGPR-K
-----	--------------	-----	--------------

Specifications


Detection method	Through beam	Circuit protection	Short circuit protection (Power polarity protection)
Rated distance Sn	5mm	Anti ambient light	Fluorescent lamp ≤ 1,000lux
Standard target	> 1.2*0.8mm	Output indication	Yellow: output indication
Light source	Infrared LED (855nm)	Ambient temperature	-25°C...55°C
Hysteresis	< 0.05mm	Environment humidity	When working: 5...85%RH (No condensation); when storing: 5...95%RH (No condensation)
Output type	NPN/PNP (Depends on part number)	Vibration resistant	10...2000Hz, Dual amplitude 1.5mm, 2hrs each for X,Y,Z direction
NO/NC Adjustment	NO/NC by specific wiring connection	Protection degree	IP65
Supply voltage	5...24 VDC (Ripple p-p: < 10%)	Housing material	PBT
Load current	≤ 50mA	Connection	1m Cable
Residual voltage	≤ 1V (When the load current is 50mA)	Weight	15g
Consumption current	≤ 15mA		
Switching frequency	≥ 1KHZ (The maximum value is 3KHZ)		

Dimensions

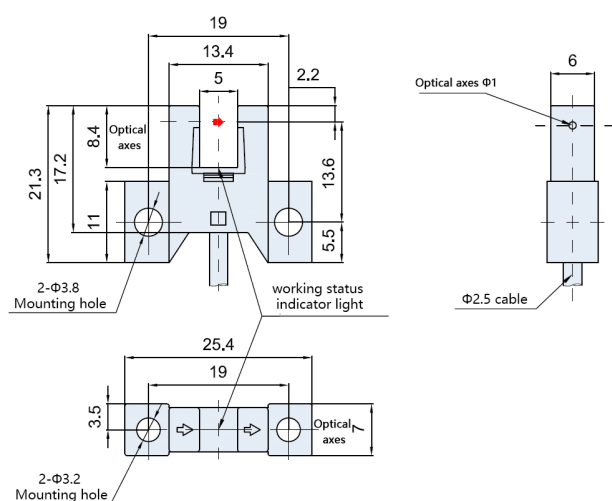


Wiring diagram

NPN

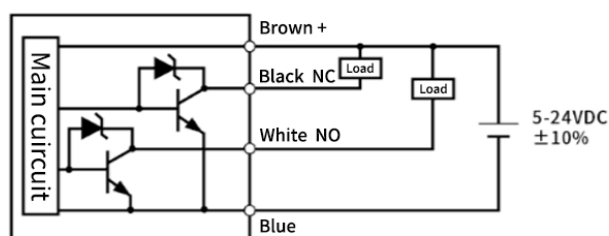

PNP

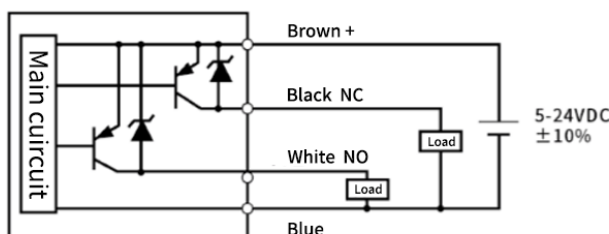

U shape photoelectric sensor PU05M series



Feature description

- The power supply voltage is 5...24VDC, and the voltage range is wide
- A variety of shapes, rich product categories
- The product has two modes: L/ON and D/ON
- Use flexible wire with good flexibility




Model specification

NPN	PU05M-TGPR-T	PNP	PU05M-TGPR-T
-----	--------------	-----	--------------

Specifications


Detection method	Through beam	Circuit protection	Short circuit protection (Power polarity protection)
Rated distance Sn	5mm	Anti ambient light	Fluorescent lamp ≤1,000lux
Standard target	> 1.2*0.8mm	Output indication	Yellow: output indication
Light source	Infrared LED (855nm)	Ambient temperature	-25°C...55°C
Hysteresis	< 0.05mm	Environment humidity	When working: 5...85%RH (No condensation); when storing: 5...95%RH (No condensation)
Output type	NPN/PNP (Depends on part number)	Vibration resistant	10...2000Hz, Dual amplitude 1.5mm, 2hrs each for X,Y,Z direction
NO/NC Adjustment	NO/NC by specific wiring connection	Protection degree	IP65
Supply voltage	5...24 VDC (Ripple p-p: < 10%)	Housing material	PBT
Load current	≤50mA	Connection	1m Cable
Residual voltage	≤1V (When the load current is 50mA)	Weight	15g
Consumption current	≤15mA		
Switching frequency	≥1KHZ (The maximum value is 3KHZ)		

Dimensions

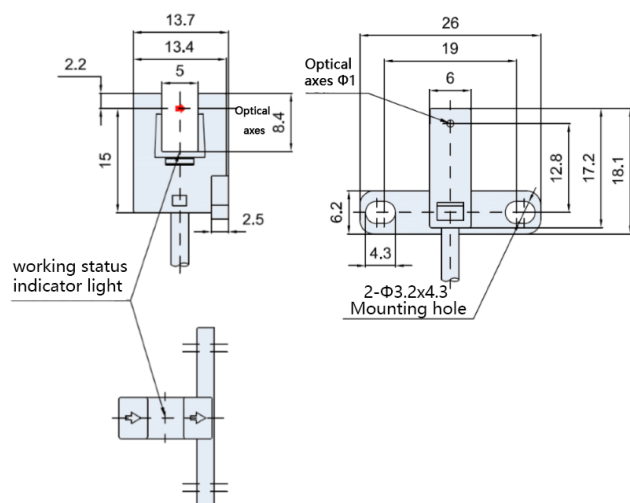


Wiring diagram

NPN

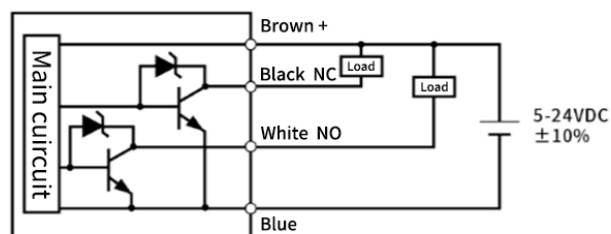

PNP

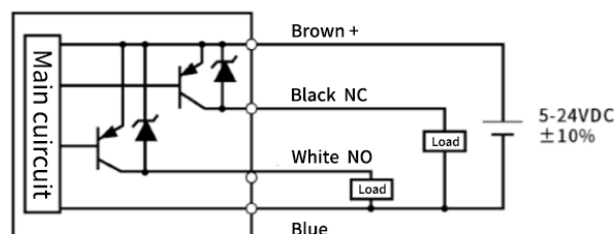

U shape photoelectric sensor PU05M series



Feature description

- The power supply voltage is 5...24VDC, and the voltage range is wide
- A variety of shapes, rich product categories
- The product has two modes: L/ON and D/ON
- Use flexible wire with good flexibility




Model specification

NPN	PU05M-TGNR-L	PNP	PU05M-TGPR-L
-----	--------------	-----	--------------

Specifications


Detection method	Through beam	Circuit protection	Short circuit protection (Power polarity protection)
Rated distance Sn	5mm	Anti ambient light	Fluorescent lamp ≤1,000lux
Standard target	> 1.2*0.8mm	Output indication	Yellow: output indication
Light source	Infrared LED (855nm)	Ambient temperature	-25°C...55°C
Hysteresis	< 0.05mm	Environment humidity	When working: 5...85%RH (No condensation); when storing: 5...95%RH (No condensation)
Output type	NPN/PNP (Depends on part number)	Vibration resistant	10...2000Hz, Dual amplitude 1.5mm, 2hrs each for X,Y,Z direction
NO/NC Adjustment	NO/NC by specific wiring connection	Protection degree	IP65
Supply voltage	5...24 VDC (Ripple p-p: < 10%)	Housing material	PBT
Load current	≤50mA	Connection	1m Cable
Residual voltage	≤1V (When the load current is 50mA)	Weight	15g
Consumption current	≤15mA		
Switching frequency	≥1KHZ (The maximum value is 3KHZ)		

Dimensions

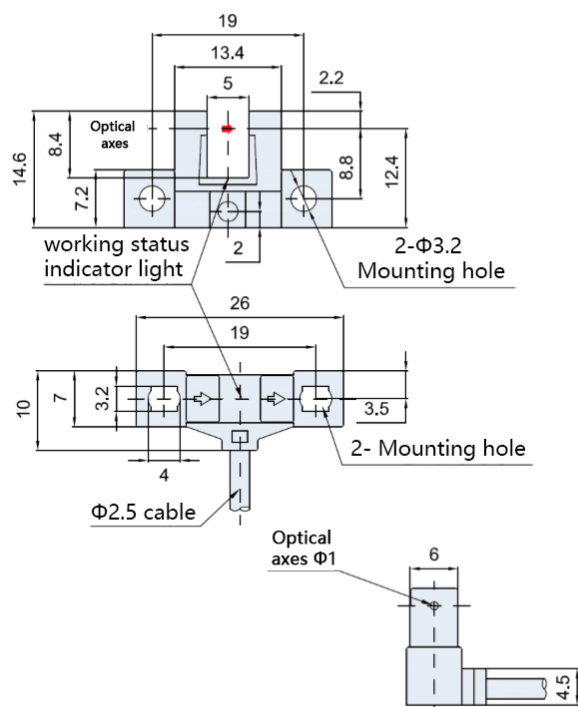


Wiring diagram

NPN

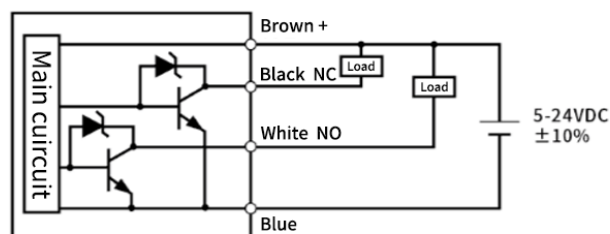

PNP

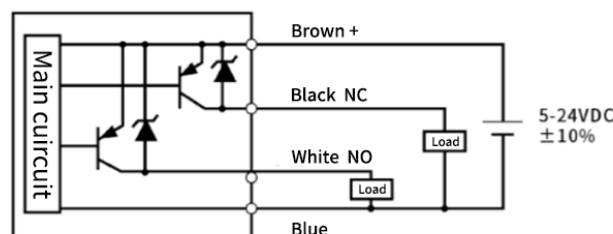

U shape photoelectric sensor PU05M series



Feature description

- The power supply voltage is 5...24VDC, and the voltage range is wide
- A variety of shapes, rich product categories
- The product has two modes: L/ON and D/ON
- Use flexible wire with good flexibility




Model specification

NPN	PU05M-TGMR-Y	PNP	PU05M-TGPR-Y
-----	--------------	-----	--------------

Specifications


Detection method	Through beam	Circuit protection	Short circuit protection (Power polarity protection)
Rated distance Sn	5mm	Anti ambient light	Fluorescent lamp ≤ 1,000lux
Standard target	> 1.2*0.8mm	Output indication	Yellow: output indication
Light source	Infrared LED (855nm)	Ambient temperature	-25°C...55°C
Hysteresis	< 0.05mm	Environment humidity	When working: 5...85%RH (No condensation); when storing: 5...95%RH (No condensation)
Output type	NPN/PNP (Depends on part number)	Vibration resistant	10...2000Hz, Dual amplitude 1.5mm, 2hrs each for X,Y,Z direction
NO/NC Adjustment	NO/NC by specific wiring connection	Protection degree	IP65
Supply voltage	5...24 VDC (Ripple p-p: < 10%)	Housing material	PBT
Load current	≤ 50mA	Connection	1m Cable
Residual voltage	≤ 1V (When the load current is 50mA)	Weight	15g
Consumption current	≤ 15mA		
Switching frequency	≥ 1KHZ (The maximum value is 3KHZ)		

Dimensions

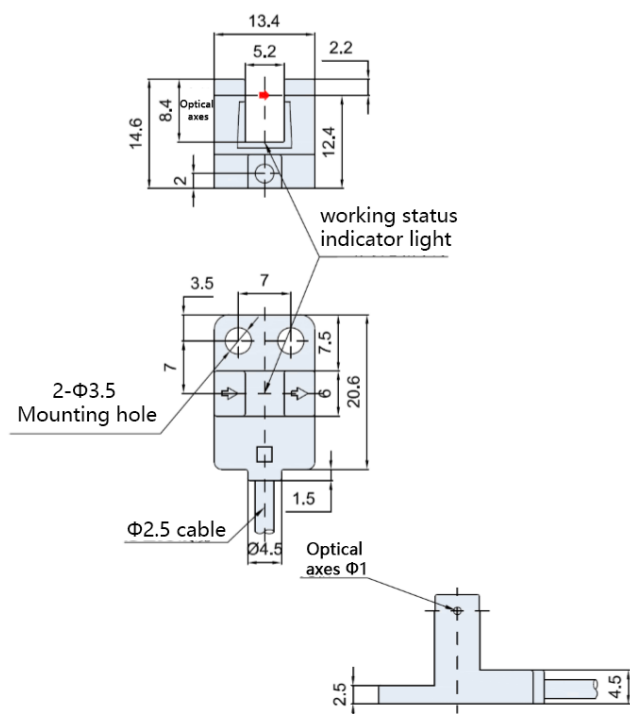


Wiring diagram

NPN

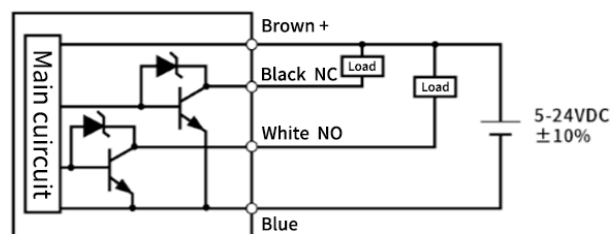

PNP

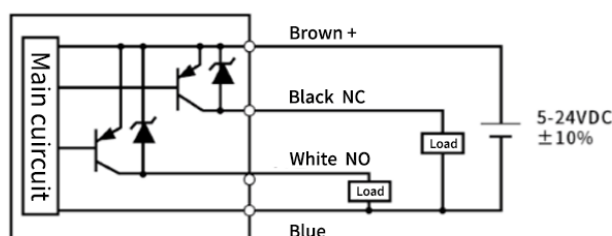

U shape photoelectric sensor PU05M series



Feature description

- The power supply voltage is 5...24VDC, and the voltage range is wide
- A variety of shapes, rich product categories
- The product has two modes: L/ON and D/ON
- Use flexible wire with good flexibility




Model specification

NPN	PU05M-TGMR-F	PNP	PU05M-TGPR-F
-----	--------------	-----	--------------

Specifications


Detection method	Through beam	Circuit protection	Short circuit protection (Power polarity protection)
Rated distance Sn	5mm	Anti ambient light	Fluorescent lamp $\leq 1,000$ lux
Standard target	$> 1.2 \times 0.8$ mm	Output indication	Yellow: output indication
Light source	Infrared LED (855nm)	Ambient temperature	$-25^{\circ}\text{C} \dots 55^{\circ}\text{C}$
Hysteresis	< 0.05 mm	Environment humidity	When working: 5...85%RH (No condensation); when storing: 5...95%RH (No condensation)
Output type	NPN/PNP (Depends on part number)		
NO/NC Adjustment	NO/NC by specific wiring connection	Vibration resistant	10...2000Hz, Dual amplitude 1.5mm,
Supply voltage	5...24 VDC (Ripple p-p: $< 10\%$)		2hrs each for X,Y,Z direction
Load current	≤ 50 mA	Protection degree	IP65
Residual voltage	≤ 1 V (When the load current is 50mA)	Housing material	PBT
Consumption current	≤ 15 mA	Connection	1m Cable
Switching frequency	≥ 1 KHZ (The maximum value is 3KHZ)	Weight	15g

Dimensions

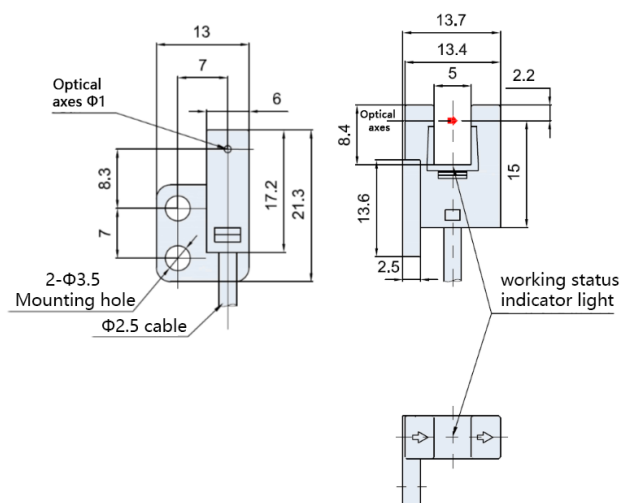


Wiring diagram


NPN

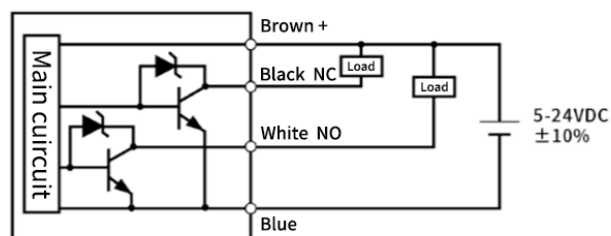

PNP

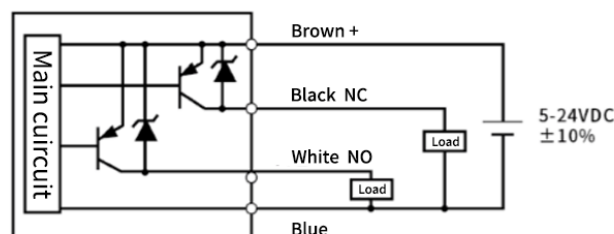

U shape photoelectric sensor PU05M series



Feature description

- The power supply voltage is 5...24VDC, and the voltage range is wide
- A variety of shapes, rich product categories
- The product has two modes: L/ON and D/ON
- Use flexible wire with good flexibility




Model specification

NPN	PU05M-TGMR-R	PNP	PU05M-TGPR-R
-----	--------------	-----	--------------

Specifications


Detection method	Through beam	Circuit protection	Short circuit protection (Power polarity protection)
Rated distance Sn	5mm	Anti ambient light	Fluorescent lamp≤1,000lux
Standard target	> 1.2*0.8mm	Output indication	Yellow: output indication
Light source	Infrared LED (855nm)	Ambient temperature	-25°C...55°C
Hysteresis	< 0.05mm	Environment humidity	When working: 5...85%RH (No condensation); when storing: 5...95%RH (No condensation)
Output type	NPN/PNP (Depends on part number)	Vibration resistant	10...2000Hz, Dual amplitude1.5mm, 2hrs each for X,Y,Z direction
NO/NC Adjustment	NO/NC by specific wiring connection	Protection degree	IP65
Supply voltage	5...24 VDC (Ripple p-p: < 10%)	Housing material	PBT
Load current	≤50mA	Connection	1m Cable
Residual voltage	≤1V (When the load current is 50mA)	Weight	15g
Consumption current	≤15mA		
Switching frequency	≥1KHZ (The maximum value is 3KHZ)		

Dimensions

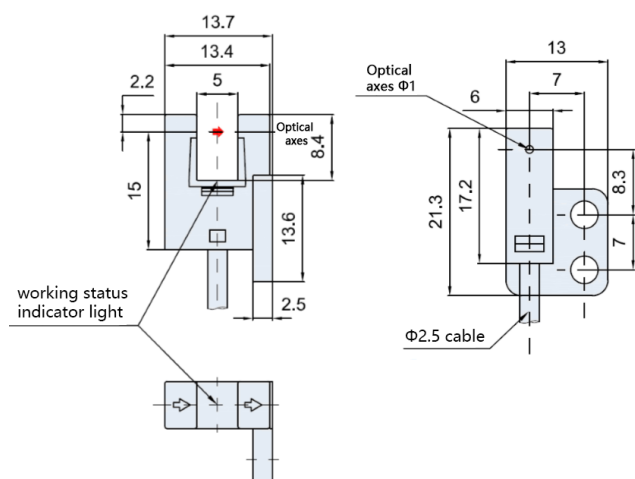

Wiring diagram

NPN

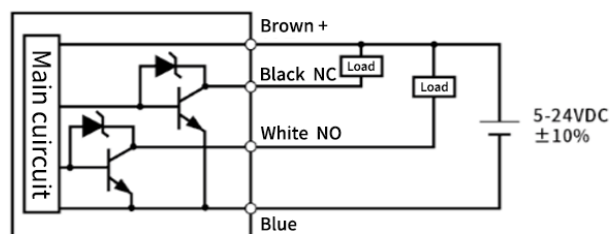

PNP

