



Z4V7H336-11Z-M20-1058

- Double-insulated
- Design to EN 50041
- suitable for elevators
- Thermoplastic enclosure
- 1 Cable entry M 20 x 1.5
- only for positioning tasks
- Wide range of alternative actuators
- Lever angle adjustable in 10° steps
- Good resistance to oil and petroleum spirit
- Actuator heads can be repositioned by 4 x 90°

Data

Ordering data

Z4V7H336-11Z-M20-1058

101171820

EAN (European Article Number)

4030661299570

Approval - Standards

cULus

CCC

EAC

General data

Housing construction form	Norm construction design
Enclosure material	Plastic, glass-fibre reinforced thermoplastic, self-extinguishing
Material of the contacts, electrical	Silver
Lever material	Metal film
Roller material	rubber
Gross weight	195 g

General data - Features

Suitable for elevators	Yes
Number of auxiliary contacts	1
Number of safety contacts	1

Safety appraisal

BG-GS-ET-15
ISO 13849-1
EN 60947-5-1

Mission Time

20 Year(s)

Mechanical data

Actuating element	Roller lever
Mechanical life, minimum	30,000,000 Operations
Actuating speed, maximum	2.5 m/s
Note (Actuating speed)	Actuating speed with actuating angle 30° to switch axis

Mechanical data - Connection technique

Note (Cable section)	All indications about the cable section are including the conductor ferrules.
----------------------	---

Mechanical data - Dimensions

Height of sensor	173.5 mm
Length of sensor	57 mm
Width of sensor	40.5 mm

Ambient conditions

	IP67
Ambient temperature, minimum	-30 °C
Ambient temperature, maximum	+80 °C

Ambient conditions - Insulation value

Rated impulse withstand voltage	6 kV
---------------------------------	------

Electrical data

Thermal test current	10 A
Required rated short-circuit current to EN 60947-5-1	1,000 A
Utilisation category AC-15	230 VAC
Utilisation category AC-15	4 A
Utilisation category DC-13	24 VDC
Utilisation category DC-13	4 A
Switching element	NO contact, NC contact
Switching principle	Snap switch element
Switching frequency	5,000 /h

Ordering code

Product type description:

(1)(2) 336-(3)Z(4)-(5)-(6)-(7)

(1)

Z Snap action

T Slow action (not available for AF/S)

(2)

S Plunger S

R Roller plunger R

H Roller lever H

10H Rod lever 10H

7H Roller lever 7H

1K Offset roller lever 1K

3K Angle roller lever 3K

RMS Brass roller

(3)

11 1 NO contacts/1 NC contact

02 2 NC contact

20 2 NO contacts, (switches with 2 NO contacts are not suitable for safety applications)

01/01 1 NC contact left / 1 NC contact right

(4)

H Slow action with staggered contacts

UE Slow action with overlapping contacts

(5)

without Cable entry M20

NPT Cable entry NPT 1/2"

ST M12 connector with A-coding

ST-2310 M12 connector with B-coding

(6)

2138 Roller lever 7H for position switches with safety function

(7)

1637 Gold-plated contacts

Pictures


Photo/Product/Catalogue



| 619,4 kB | .jpg | 237.419 x 504.119 mm - 673 x 1429
Pixel - 72 dpi


| 81,1 kB | .png | 74.083 x 156.986 mm - 210 x 445
Pixel - 72 dpi

Dimension/Product/Basic

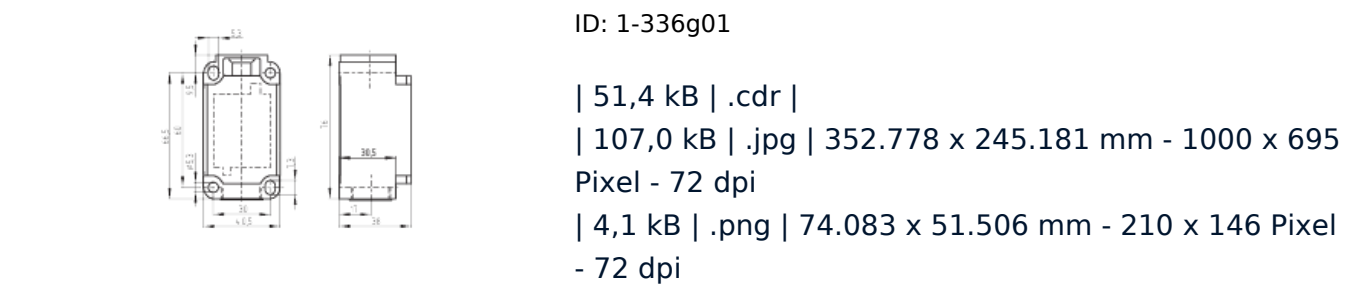


| 51,4 kB | .cdr |
| 107,0 kB | .jpg | 352.778 x 245.181 mm - 1000 x 695
Pixel - 72 dpi
| 4,1 kB | .png | 74.083 x 51.506 mm - 210 x 146 Pixel
- 72 dpi

Diagramm/Product/Travel	Diagramm	Product	Travel
Diagramm	Diagramm		
Product		Product	
Travel			Travel

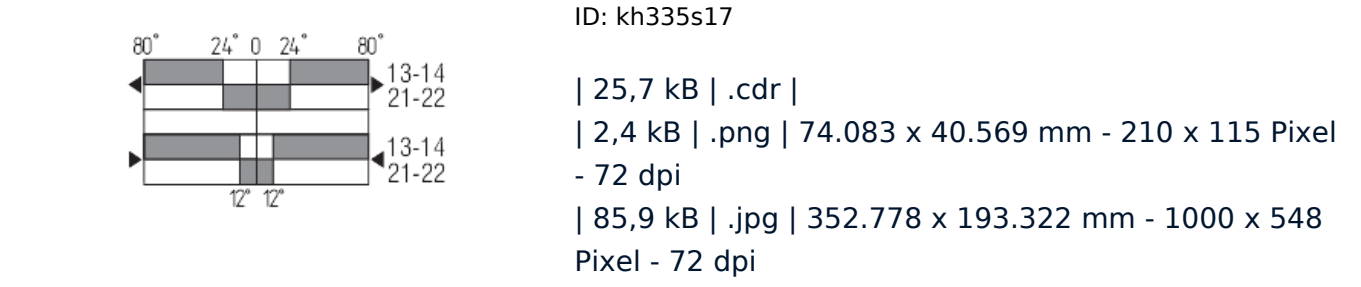


| 25,7 kB | .cdr |
| 2,4 kB | .png | 74.083 x 40.569 mm - 210 x 115 Pixel
- 72 dpi
| 85,9 kB | .jpg | 352.778 x 193.322 mm - 1000 x 548
Pixel - 72 dpi

Dimension/Product/Actuator

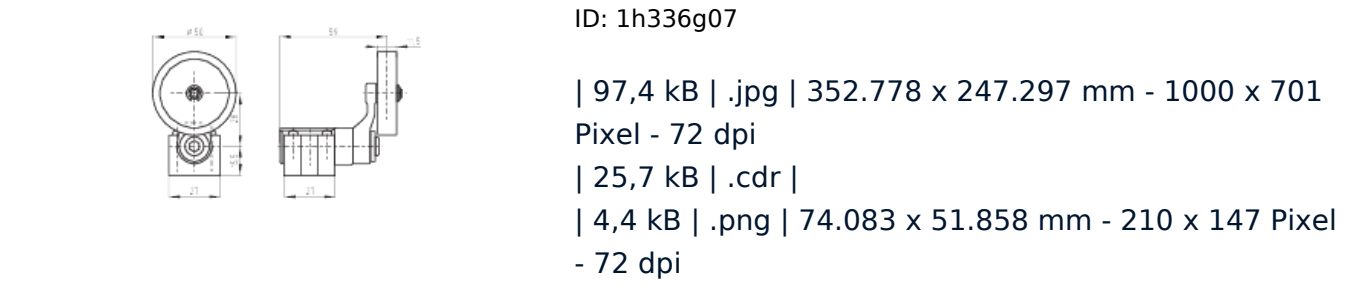

| 97,4 kB | .jpg | 352.778 x 247.297 mm - 1000 x 701
Pixel - 72 dpi
| 25,7 kB | .cdr |
| 4,4 kB | .png | 74.083 x 51.858 mm - 210 x 147 Pixel
- 72 dpi

Dimension/Product/Actuator



ID: kh336g07

| 106,6 kB | .jpg | 352.778 x 239.889 mm - 1000 x 680
Pixel - 72 dpi

| 23,7 kB | .cdr |

| 4,4 kB | .png | 74.083 x 50.447 mm - 210 x 143 Pixel
- 72 dpi

K.A. Schmersal GmbH & Co. KG, Möddinghofe 3, D-42279 Wuppertal

The details and data referred to have been carefully checked. Images may diverge from original. Further technical data can be found in the manual. Technical amendments and errors possible.

Generated on 312021-01-31T04:50:31+01:000401Europe/BerlinSun, 31 Jan 2021 04:50:31

+010031amSunday.31am31Europe/BerlinCET5001Europe/BerlinJanuary2021Sun, 31 Jan 2021 04:50:31

+010001am31